

# REPLACEABLE ELECTRICAL PARTS

## PARTS ORDERING INFORMATION

Replacement parts are available from or through your local Tektronix, Inc. Field Office or representative.

Changes to Tektronix instruments are sometimes made to accommodate improved components as they become available, and to give you the benefit of the latest circuit improvements developed in our engineering department. It is therefore important, when ordering parts, to include the following information in your order: Part number, instrument type or number, serial number, and modification number if applicable.

If a part you have ordered has been replaced with a new or improved part, your local Tektronix, Inc. Field Office or representative will contact you concerning any change in part number.

Change information, if any, is located at the rear of this manual.

### LIST OF ASSEMBLIES

A list of assemblies can be found at the beginning of the Electrical Parts List. The assemblies are listed in numerical order. When the complete component number of a part is known, this list will identify the assembly in which the part is located.

### CROSS INDEX-MFR. CODE NUMBER TO MANUFACTURER


The Mfr. Code Number to Manufacturer index for the Electrical Parts List is located immediately after this page. The Cross Index provides codes, names and addresses of manufacturers of components listed in the Electrical Parts List.

### ABBREVIATIONS


Abbreviations conform to American National Standard Y1.1.

### COMPONENT NUMBER (column one of the Electrical Parts List)

A numbering method has been used to identify assemblies, subassemblies and parts. Examples of this numbering method and typical expansions are illustrated by the following:



**Read: Resistor 1234 of Assembly 23**

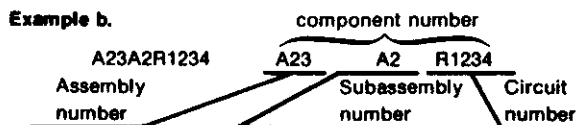

**Read: Resistor 1234 of Subassembly 2 of Assembly 23**

Only the circuit number will appear on the diagrams and circuit board illustrations. Each diagram and circuit board illustration is clearly marked with the assembly number. Assembly numbers are also marked on the mechanical exploded views located in the Mechanical Parts List. The component number is obtained by adding the assembly number prefix to the circuit number.

The Electrical Parts List is divided and arranged by assemblies in numerical sequence (e.g., assembly A1 with its subassemblies and parts, precedes assembly A2 with its subassemblies and parts).

Chassis-mounted parts have no assembly number prefix and are located at the end of the Electrical Parts List.

### TEKTRONIX PART NO. (column two of the Electrical Parts List)

Indicates part number to be used when ordering replacement part from Tektronix.

### SERIAL/MODEL NO. (columns three and four of the Electrical Parts List)

Column three (3) indicates the serial number at which the part was first used. Column four (4) indicates the serial number at which the part was removed. No serial number entered indicates part is good for all serial numbers.

### NAME & DESCRIPTION (column five of the Electrical Parts List)

In the Parts List, an Item Name is separated from the description by a colon (:). Because of space limitations, an Item Name may sometimes appear as incomplete. For further Item Name identification, the U.S. Federal Cataloging Handbook H6-1 can be utilized where possible.

### MFR. CODE (column six of the Electrical Parts List)

Indicates the code number of the actual manufacturer of the part. (Code to name and address cross reference can be found immediately after this page.)

### MFR. PART NUMBER (column seven of the Electrical Parts List)

Indicates actual manufacturers part number.

CROSS INDEX—MFR. CODE NUMBER TO MANUFACTURER

Mfr. Code	Manufacturer	Address	City, State, Zip
000FG	RIFA WORLD PRODUCTS INC.	7625 BUSH LAKE RD P.O. BOX 35263	MINNEAPOLIS, MN 55435
000FJ	MARCOM SWITCHES INC.	67 ALBANY STREET	CAZENOVIA, N.Y. 13035
000HX	SAN-O INDUSTRIAL CORP.	170 WILBUR PLACE	BAHEMIA LONG ISLAND, NY 11716
000IG	FUJITSU-AMERICA INC.	1208 E. ARQUES AVE.	SUNNYVALE, CA 94086
000JF	FUJI SEMICONDUCTOR	NEW YURAKUCHO BLDG	TOKYO 100, JAPAN
00213	NYTRONICS, COMPONENTS GROUP, INC., SUBSIDIARY OF NYTRONICS, INC.	ORANGE STREET	DARLINGTON, SC 29532
00779	AMP, INC.	P.O. BOX 3608	HARRISBURG, PA 17105
01121	ALLEN-BRADLEY COMPANY	1201 2ND STREET SOUTH	MILWAUKEE, WI 53204
01295	TEXAS INSTRUMENTS, INC. SEMICONDUCTOR GROUP	P.O. BOX 5012	DALLAS, TX 75222
01963	CHERRY ELECTRICAL PRODUCTS CORPORATION	3600 SUNSET AVENUE	WAUKEGAN, IL 60085
02111	SPECTROL ELECTRONICS CORPORATION	17070 EAST GALE AVENUE	CITY OF INDUSTRY, CA 91745
02113	COILCRAFT INC.	1102 SILVER LAKE RD.	CARY, IL 60013
02735	RCA CORPORATION, SOLID STATE DIVISION	ROUTE 202	SOMERVILLE, NY 08876
03508	GENERAL ELECTRIC COMPANY, SEMI-CONDUCTOR PRODUCTS DEPARTMENT	ELECTRONICS PARK P O BOX 867	SYRACUSE, NY 13201
04222	AVX CERAMICS, DIVISION OF AVX CORP.	5005 E MCDOWELL RD, PO BOX 20923	MYRTLE BEACH, SC 29577
04713	MOTOROLA, INC., SEMICONDUCTOR PROD. DIV.		PHOENIX, AZ 85038
07263	FAIRCHILD SEMICONDUCTOR, A DIV. OF FAIRCHILD CAMERA AND INSTRUMENT CORP.	464 ELLIS STREET RICHARDS AVENUE	MOUNTAIN VIEW, CA 94042
09922	BURNDY CORPORATION	LOWER WASHINGTON STREET	NORWALK, CT 06852
12697	CLAROSTAT MFG. CO., INC.	580 PLEASANT STREET	DOVER, NH 03820
12969	UNITRODE CORPORATION	3301 ELECTRONICS WAY P O BOX 3049	WATERTOWN, MA 02172
14433	ITT SEMICONDUCTORS	2830 E FAIRVIEW ST. 1710 S. DEL MAR AVE.	WEST PALM BEACH, FL 33402
14552	MICRO SEMICONDUCTOR CORP.		SANTA ANA, CA 92704
14752	ELECTRO CUBE INC.		SAN GABRIEL, CA 91776
15238	ITT SEMICONDUCTORS, A DIVISION OF INTER NATIONAL TELEPHONE AND TELEGRAPH CORP.	P.O. BOX 168, 500 BROADWAY	LAWRENCE, MA 01841
15454	RODAN INDUSTRIES, INC.	2905 BLUE STAR ST.	ANAHEIM, CA 92806
17856	SILICONIX, INC.	2201 LAURELWOOD DRIVE	SANTA CLARA, CA 95054
20932	EMCON DIV OF ILLINOIS TOOL WORKS INC.	11620 SORRENTO VALLEY RD P O BOX 81542	SAN DIEGO, CA 92121
22526	BERG ELECTRONICS, INC.	YOUK EXPRESSWAY	NEW CUMBERLAND, PA 17070
22753	U. I. D. ELECTRONICS CORP.	4105 PEMBROKE RD.	HOLLYWOOD, FL 33021
24546	CORNING GLASS WORKS, ELECTRONIC COMPONENTS DIVISION	550 HIGH STREET 186 WOOD AVE. S	BRADFORD, PA 16701
25088	SIEMENS CORP.	2900 SEMICONDUCTOR DR.	ISELIN, NJ 08830
27014	NATIONAL SEMICONDUCTOR CORP.	8081 WALLACE ROAD	SANTA CLARA, CA 95051
31918	IEE/SCHADOW INC.	2201 E. ELVIRA ROAD	EDEN PRAIRIE, MN 55343
32159	WEST-CAP ARIZONA	1200 COLUMBIA AVE.	TUCSON, AZ 85706
32997	BOURNS, INC., TRIMPOT PRODUCTS DIV.	901 THOMPSON PL.	RIVERSIDE, CA 92507
34335	ADVANCED MICRO DEVICES	26 COROMAR DRIVE	SUNNYVALE, CA 94086
34479	RENCO CORP	P. O. BOX 787	GOLETA, CA 93117
50157	MIDWEST COMPONENTS INC.	1981 PORT CITY BLVD. 640 PAGE MILL ROAD	MUSKEGON, MI 49443
50434	HEWLETT-PACKARD COMPANY	2820 E COLLEGE AVENUE	PALO ALTO, CA 94304
51642	CENTRE ENGINEERING INC.	1 PANASONIC WAY	STATE COLLEGE, PA 16801
54473	MATSUSHITA ELECTRIC, CORP. OF AMERICA	PO BOX 1806, 1517 130TH AVE.	SECAUCUS, NJ 07094
54937	DEYOUNG MFG., INC.	5334 STERLING CENTER DR.	BELLEVUE, WA 98009
55112	PLESSEY CAPACITORS, DIV. OF PLESSEY INC.	6435 N PROESEL AVENUE	WEST LAKE VILLAGE, CA 91361
55680	NICHICON/AMERICA/CORP.	87 MARSHALL ST.	CHICAGO, IL 60645
56289	SPRAGUE ELECTRIC CO.	16931 MILLIKEN AVE.	NORTH ADAMS, MA 01247
57668	R-OHM CORP.	2155 N FORBES BLVD	IRVINE, CA 92713
59680	TUSONIX INC.	7158 MERCHANT AVE	TUCSON, AZ 85705
59821	CENTRALAB INC		EL PASO, TX 79915
71400	SUB NORTH AMERICAN PHILIPS CORP BUSSMAN MFG., DIVISION OF MCGRAW- EDISON CO.	2536 W. UNIVERSITY ST. 644 W. 12TH ST.	ST. LOUIS, MO 63107
72982	ERIE TECHNOLOGICAL PRODUCTS, INC.	2500 HARBOR BLVD.	ERIE, PA 16512
73138	BECKMAN INSTRUMENTS, INC., HELIPOT DIV.	1933 HECK AVE.	FULLERTON, CA 92634
74276	SIGNALITE DIV., GENERAL INSTRUMENT CORP.	299 10TH AVE. S. W.	NEPTUNE, NJ 07753
74970	JOHNSON, E. F., CO.		WASECA, MN 56093
75042	TRW ELECTRONIC COMPONENTS, IRC FIXED RESISTORS, PHILADELPHIA DIVISION	401 N. BROAD ST.	PHILADELPHIA, PA 19108

## CROSS INDEX—MFR. CODE NUMBER TO MANUFACTURER

Mfr. Code	Manufacturer	Address	City, State, Zip
75915	LITTELFUSE, INC.	800 E. NORTHWEST HWY	DES PLAINES, IL 60016
76493	BELL INDUSTRIES, INC., MILLER, J. W., DIV.	19070 REYES AVE., P O BOX 5825	COMPTON, CA 90224
76854	OAK INDUSTRIES, INC., SWITCH DIV.	S. MAIN ST.	CRYSTAL LAKE, IL 60014
80009	TEKTRONIX, INC.	P O BOX 500	BEAVERTON, OR 97077
80031	ELECTRA-MIDLAND CORP., MEPCO DIV.	22 COLUMBIA ROAD	MORRISTOWN, NJ 07960
81483	INTERNATIONAL RECTIFIER CORP.	9220 SUNSET BLVD.	LOS ANGELES, CA 90069
84411	TRW ELECTRONIC COMPONENTS, TRW CAPACITORS	112 W. FIRST ST.	OGALLALA, NE 69153
90201	MALLORY CAPACITOR CO., DIV. OF P. R. MALLORY AND CO., INC.	3029 E. WASHINGTON STREET P. O. BOX 372	INDIANAPOLIS, IN 46206
91637	DALE ELECTRONICS, INC.	P. O. BOX 609	COLUMBUS, NE 68601
93410	ESSEX INTERNATIONAL, INC., CONTROLS DIV. LEXINGTON PLANT	P. O. BOX 1007	MANSFIELD, OH 44903
96733	SAN FERNANDO ELECTRIC MFG CO	1501 FIRST ST	SAN FERNANDO, CA 91341

Replaceable Electrical Parts—2465 Service

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A1	670-7276-00	B010100	B01999	CKT BOARD ASSY:MAIN	80009	670-7276-00
A1	-----			(STANDARD ONLY)		
A1	670-7276-02	B020000		CKT BOARD ASSY:MAIN		
A1	-----			(STANDARD ONLY)		
A1	670-7276-01	B020000		CKT BOARD ASSY:MAIN	80009	670-7276-01
A1	-----			(OPTION 01, 05, 06, 09 ONLY)		
	672-1037-00	B010100	B01999	CKT BOARD ASSY:LV/POWER SUPPLY MODULE		
	672-1037-02	B020000		CKT BOARD ASSY:LV/POWER SUPPLY MODULE		
A2	-----			CKT BOARD ASSY:REGULATOR		
A2	-----			(AVAILABLE AT 672-1037-XX LEVEL ONLY)		
A3	-----			CKT BOARD ASSY:INVERTER		
A3	-----			(AVAILABLE AT 672-1037-XX LEVEL ONLY)		
A4	670-7278-00			CKT BOARD ASSY:BUS MONITOR	80009	670-7278-00
A5	670-7279-00			CKT BOARD ASSY:DIGITAL CONTROL	80009	670-7279-00
A5	672-1038-00	B010100	B019999	CKT BOARD ASSY:FR PNL MODULE	80009	672-1038-00
A5	672-1038-02	B020000		CKT BOARD ASSY:FR PNL MODULE	80009	672-1038-00
A6	-----			CKT BOARD ASSY:FRONT PANEL		
A6	-----			(AVAILABLE AT 672-1038-00 LEVEL ONLY)		
A7	670-7284-00			CKT BOARD ASSY:FRONT PANEL VARIABLE	80009	670-7284-00
A8	670-7280-00			CKT BOARD ASSY:SCALE ILLUMINATION	80009	670-7280-00
A9	670-7277-00	B010100	B010999	CKT BOARD ASSY:HIGH VOLTAGE	80009	670-7277-00
A9	670-7277-01	B011000		CKT BOARD ASSY:HIGH VOLTAGE	80009	670-7277-01
A10	670-7390-00			CKT BOARD ASSY:FAN MOTOR	80009	670-7390-00
A11	119-1445-01			ATTENUATOR,VAR:PROGRAMMABLE 1X-100X,CH1	80009	119-1445-01
A11	-----			(CHANNEL 1)		
A12	119-1445-02			ATTENUATOR,VAR:PROGRAMMABLE,1X-100X,CH2	80009	119-1445-02
A12	-----			(CHANNEL 2)		
A13	307-1154-00			PASSIVE NETWORK:CRT TERMINATOR,FINISHED	80009	307-1154-00
A14	670-8000-00			CKT BOARD ASSY:DYNAMIC CENTERING	80009	670-8000-00
A1	670-7276-00			CKT BOARD ASSY:MAIN	80009	670-7276-00
A1C100	283-0000-00			CAP.,FXD,CER DI:0.001UF,+100-0%,500V	59660	831810Y5U0102P
A1C100	-----			(COMBO W/R100)		
A1C102	290-0963-00	B010100	B010249	CAP.,FXD,ELCTLT:220UF,+50-10%,25V	54473	ECEA1EV221S
A1C102	290-0973-00	B010250		CAP.,FXD,ELCTLT: 100UF,20%,25VDC	55680	OBD
A1C103	283-0492-00			CAP.,FXD,CER DI:100PF,20%	20932	501EM50DP10SM
A1C104	283-0000-00			CAP.,FXD,CER DI:0.001UF,+100-0%,500V	59660	831810Y5U0102P
A1C105	281-0064-00			CAP.,VAR,PLSTC:0.25-1.5PF,800V	74970	273-0001-101
A1C106	283-0024-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	72982	8121N083Z5U0104Z
A1C107	290-0943-00			CAP.,FXD,ELCTLT:47UF,+50-10%,25V	55680	ULB1E470TECANA
A1C108	283-0423-00			CAP.,FXD,CER DI:0.22UF,+80-20%,50V	04222	DG015E224Z
A1C112	281-0797-00			CAP.,FXD,CER DI:15PF,10%,100V	72982	8035D9AADCOG150K
A1C113	283-0423-00			CAP.,FXD,CER DI:0.22UF,+80-20%,50V	04222	DG015E224Z
A1C114	290-0943-00			CAP.,FXD,ELCTLT:47UF,+50-10%,25V	55680	ULB1E470TECANA
A1C115	281-0781-00			CAP.,FXD,CER DI:27PF,5%,100V	72982	314-008S2H270J
A1C116	281-0814-00			CAP.,FXD,CER DI:100PF,10%,100V	04222	GC101A101K
A1C117	283-0024-00	B010100	B019999	CAP.,FXD,CER DI:0.1UF,+80-20%,50V	72982	8121N083Z5U0104Z
A1C117	283-0421-00	B020000		CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C118	281-0205-00			CAP.,VAR,PLSTC:5.5-65PF,100V	80031	2810C5R565QJ02F0
A1C119	283-0024-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	72982	8121N083Z5U0104Z
A1C120	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C121	290-0943-00			CAP.,FXD,ELCTLT:47UF,+50-10%,25V	55680	ULB1E470TECANA
A1C122	283-0010-00			CAP.,FXD,CER DI:0.05UF,+100-20%,50V	56289	1C10Z5U503Z050B

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A1C125	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C130	290-0776-00			CAP.,FXD,ELCTL:22UF,+50-10%,10V	55680	ULA1A220TEA
A1C175	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C176	283-0479-00			CAP.,FXD,CER DI:0.47UF,+80-20%,25V	20932	501ES25DP474E
A1C177	283-0479-00			CAP.,FXD,CER DI:0.47UF,+80-20%,25V	20932	501ES25DP474E
A1C179	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A1C180	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C181	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C184	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A1C185	290-0943-00			CAP.,FXD,ELCTL:47UF,+50-10%,25V	55680	ULB1E470TECANA
A1C186	283-0024-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	72982	8121N083Z5U0104Z
A1C200	283-0000-00			CAP.,FXD,CER DI:0.001UF,+100-0%,500V	59660	831610Y5U0102P
A1C202	283-0492-00			CAP.,FXD,CER DI:100PF,20%	20932	501EM50DP10SM
A1C203	283-0421-00	B010100	B019999	CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C203	283-0492-00	B020000		CAP.,FXD,CER DI:100PF,20%	20932	501EM50DP10SM
A1C205	281-0064-00			CAP.,VAR,PLSTC:0.25-1.5PF,600V	74970	273-0001-101
A1C206	283-0000-00			CAP.,FXD,CER DI:0.001UF,+100-0%,500V	59660	831610Y5U0102P
A1C207	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C217	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C218	290-0943-00			CAP.,FXD,ELCTL:47UF,+50-10%,25V	55680	ULB1E470TECANA
A1C219	283-0024-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	72982	8121N083Z5U0104Z
A1C220	283-0024-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	72982	8121N083Z5U0104Z
A1C221	290-0943-00			CAP.,FXD,ELCTL:47UF,+50-10%,25V	55680	ULB1E470TECANA
A1C222	283-0010-00			CAP.,FXD,CER DI:0.05UF,+100-20%,50V	56289	1C10Z5U503Z050B
A1C225	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A1C301	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C302	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A1C303	281-0547-00	B010100	B019999	CAP.,FXD,CER DI:2.7PF,10%,500V	04222	7001-COJ-2R7C
A1C306	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C307	290-0943-00			CAP.,FXD,ELCTL:47UF,+50-10%,25V	55680	ULB1E470TECANA
A1C310	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C311	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C312	281-0547-00	B010100	B019999	CAP.,FXD,CER DI:2.7PF,10%,500V	04222	7001-COJ-2R7C
A1C325	290-0943-00			CAP.,FXD,ELCTL:47UF,+50-10%,25V	55680	ULB1E470TECANA
A1C329	281-0773-00			CAP.,FXD,CER DI:0.01UF,10%,100V	04222	SA201C103KAA
A1C332	281-0773-00			CAP.,FXD,CER DI:0.01UF,10%,100V	04222	SA201C103KAA
A1C336	290-0943-00			CAP.,FXD,ELCTL:47UF,+50-10%,25V	55680	ULB1E470TECANA
A1C402	281-0762-00			CAP.,FXD,CER DI:27PF,20%,100V	04222	GC101A270M
A1C403	281-0218-00			CAP.,VAR,CER DI:1-5PF,+2-2.5%,100V	59660	513-013A1-5
A1C404	281-0221-00			CAP.,VAR,CER DI:2-10PF,100V	59660	513-013A 2 0-10
A1C412	281-0762-00			CAP.,FXD,CER DI:27PF,20%,100V	04222	GC101A270M
A1C415	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C450	283-0421-00	B010100	B019999	CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C454	283-0421-00	B010100	B019999	CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C458	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C460	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C464	281-0763-00			CAP.,FXD,CER DI:47PF,10%,100V	04222	GA101A470KAA
A1C466	281-0797-00			CAP.,FXD,CER DI:15PF,10%,100V	72982	8035D9AADC0G150K
A1C467	281-0797-00			CAP.,FXD,CER DI:15PF,10%,100V	72982	8035D9AADC0G150K
A1C478	281-0759-00			CAP.,FXD,CER DI:22PF,10%,100V	96733	R2735
A1C480	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A1C487	281-0823-00			CAP.,FXD,CER DI:470PF,10%,50V	12969	CGB471KDN
A1C488	281-0814-00			CAP.,FXD,CER DI:100PF,10%,100V	04222	GC101A101K
A1C512	290-0246-00			CAP.,FXD,ELCTL:3.3UF,10%,15V	56289	162D335X9015CD2

Replaceable Electrical Parts—2465 Service

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A1C513	281-0775-00	B010100	B019999	CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A1C513	283-0479-00	B020000		CAP.,FXD,CER DI:0.47UF,+80-20%,25V	20932	501ES25DP474E
A1C520	281-0814-00			CAP.,FXD,CER DI:100PF,10%,100V	04222	GC101A101K
A1C521	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C528	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C536	290-0246-00			CAP.,FXD,ELCTLT:3.3UF,10%,15V	56289	162D335X9015CD2
A1C537	281-0775-00	B010100	B019999	CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A1C537	283-0479-00	B020000		CAP.,FXD,CER DI:0.47UF,+80-20%,25V	20932	501ES25DP474E
A1C544	281-0814-00			CAP.,FXD,CER DI:100PF,10%,100V	04222	GC101A101K
A1C617	281-0773-00			CAP.,FXD,CER DI:0.01UF,10%,100V	04222	SA201C103KAA
A1C625	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C645	281-0773-00			CAP.,FXD,CER DI:0.01UF,10%,100V	04222	SA201C103KAA
A1C650	281-0823-00			CAP.,FXD,CER DI:470PF,10%,50V	12969	CGB471KDN
A1C653	281-0819-00			CAP.,FXD,CER DI:33PF,5%,50V	72982	8035BC0G330
A1C660	281-0786-00	B010100	B019999	CAP.,FXD,CER DI:150PF,10%,100V	51642	G1710100NP0151K
A1C660	281-0851-00	B020000		CAP.,FXD,CER DI:180PF,5%,100VDC	04222	GC10-1-A-181K
A1C669	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A1C675	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A1C707	281-0808-00			CAP.,FXD,CER DI:7PF,20%,100V	04222	GC10-1A7ROM
A1C708	285-0676-01			CAP.,FXD,PLSTC:0.1UF,3.5%,35V	80009	285-0676-01
A1C709	285-1060-00			CAP.,FXD,PLSTC:10UF,3%,25V	80009	285-1060-00
A1C710	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A1C712	283-0479-00			CAP.,FXD,CER DI:0.47UF,+80-20%,25V	20932	501ES25DP474E
A1C722	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C723	290-0943-00			CAP.,FXD,ELCTLT:47UF,+50-10%,25V	55680	ULB1E470TECANA
A1C731	290-0963-00	B010100	B010249	CAP.,FXD,ELCTLT:220UF,+50-10%,25V	54473	ECEA1EV221S
A1C731	290-0973-00	B010250		CAP.,FXD,ELCTLT:100UF,20%,25VDC	55680	OBD
A1C733	290-0943-00			CAP.,FXD,ELCTLT:47UF,+50-10%,25V	55680	ULB1E470TECANA
A1C735	281-0823-00			CAP.,FXD,CER DI:470PF,10%,50V	12969	CGB471KDN
A1C738	290-0943-00			CAP.,FXD,ELCTLT:47UF,+50-10%,25V	55680	ULB1E470TECANA
A1C740	290-0943-00			CAP.,FXD,ELCTLT:47UF,+50-10%,25V	55680	ULB1E470TECANA
A1C742	281-0812-00			CAP.,FXD,CER DI:1000PF,10%,100V	12969	CGB102KEX
A1C803	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C805	281-0823-00			CAP.,FXD,CER DI:470PF,10%,50V	12969	CGB471KDN
A1C806	283-0156-00			CAP.,FXD,CER DI:1000PF,+100-0%,200V	96733	R2670
A1C808	281-0757-00			CAP.,FXD,CER DI:10PF,20%,100V	72982	8035-D-COG-100G
A1C809	281-0819-00			CAP.,FXD,CER DI:33PF,5%,50V	72982	8035BC0G330
A1C810	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C811	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C817	281-0812-00			CAP.,FXD,CER DI:1000PF,10%,100V	12969	CGB102KEX
A1C819	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C822	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C850	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C851	283-0479-00			CAP.,FXD,CER DI:0.47UF,+80-20%,25V	20932	501ES25DP474E
A1C852	283-0479-00			CAP.,FXD,CER DI:0.47UF,+80-20%,25V	20932	501ES25DP474E
A1C853	283-0479-00			CAP.,FXD,CER DI:0.47UF,+80-20%,25V	20932	501ES25DP474E
A1C854	283-0479-00			CAP.,FXD,CER DI:0.47UF,+80-20%,25V	20932	501ES25DP474E
A1C907	281-0808-00			CAP.,FXD,CER DI:7PF,20%,100V	04222	GC10-1A7ROM
A1C908	285-0752-03			CAP.,FXD,PLSTC:1UF,3%,50V	80009	285-0752-03
A1C912	281-0775-00	B010100	B019999	CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A1C912	283-0421-00	B020000		CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C933	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C938	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C940	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A1C943	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C956	281-0773-00			CAP.,FXD,CER DI:0.01UF,10%,100V	04222	SA201C103KAA
A1C957	290-0804-00			CAP.,FXD,ELCTLT:10UF,+50-10%,25V	55680	ULA1E100TEA
A1C958	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C966	281-0783-00			CAP.,FXD,CER DI:0.1UF,20%,100V	96733	ADVIXE
A1C967	281-0783-00	B020000		CAP.,FXD,CER DI:0.1UF,20%,100V	96733	ADVIXE
A1C972	281-0756-00			CAP.,FXD,CER DI:2.2PF,0.5%,200V	12969	CGB2R2DFN
A1C973	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C975	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A1C980	281-0775-00	B020000		CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A1C988	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C990	283-0421-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A1C995	281-0810-00			CAP.,FXD,CER DI:5.6PF,0.5%,100V	04222	GC10-1A5R6D
A1CR100	152-0323-01			SEMICOND DEVICE:SILICON,35V,100MA (IN COMBO W/CR200)	03508	DE101
A1CR100	-----					
A1CR101	152-0322-00	B010100	B013249	SEMICOND DEVICE:SILICON,15V,HOT CARRIER (IN COMBO W/CR201)	50434	5082-2672
A1CR101	-----					
A1CR101	152-0323-01	B013250		SEMICOND DEVICE:SILICON,35V,100MA (IN COMBO W/CR201)	03508	DE101
A1CR101	-----					
A1CR107	152-0086-00			SEMICOND DEVICE:SILICON,400V,750MA	14433	LG4016
A1CR130	152-0141-02			SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR131	152-0141-02			SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR140	152-0141-02			SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR141	152-0141-02			SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR142	152-0141-02			SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR143	152-0141-02			SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR144	152-0141-02			SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR145	152-0141-02			SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR146	152-0141-02			SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR147	152-0141-02			SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR148	152-0141-02			SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR149	152-0141-02			SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR150	152-0141-02			SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR151	152-0141-02			SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR152	152-0141-02			SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR153	152-0141-02			SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR154	152-0141-02			SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR155	152-0141-02			SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR160	152-0141-02			SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR161	152-0141-02			SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR162	152-0141-02			SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR163	152-0141-02			SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR200	152-0323-01			SEMICOND DEVICE:SILICON,35V,100MA (IN COMBO W/CR100)	03508	DE101
A1CR200	-----					
A1CR201	152-0322-00	B010100	B013249	SEMICOND DEVICE:SILICON,15V,HOT CARRIER (IN COMBO W/CR101)	50434	5082-2672
A1CR201	-----					
A1CR201	152-0323-01	B013250		SEMICOND DEVICE:SILICON,35V,100MA	03508	DE101
A1CR201	-----			(IN COMBO W/CR101)		
A1CR355	152-0141-02			SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR356	152-0141-02			SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR358	152-0141-02			SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR359	152-0141-02			SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR460	152-0141-02			SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R

Replaceable Electrical Parts—2465 Service

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A1CR461	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR476	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR484	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR485	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR495	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR503	152-0141-02	B020000		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR600	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR616	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR652	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR653	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR707	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR741	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR746	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR747	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR752	152-0075-00			SEMICONV DEVICE:GE,25V,40MA	14433	G866
A1CR807	152-0574-00			SEMICONV DEVICE:SILICON,120V,0.15A	14433	WG1308
A1CR811	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR950	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR951	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR956	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A1CR966	152-0574-00			SEMICONV DEVICE:SILICON,120V,0.15A	14433	WG1308
A1CR972	152-0574-00			SEMICONV DEVICE:SILICON,120V,0.15A	14433	WG1308
A1CR987	152-0574-00			SEMICONV DEVICE:SILICON,120V,0.15A	14433	WG1308
A1DL100	119-1490-00	B010100	B012577	DELAY LINE,ELEC:73NS,150 OHM	80009	119-1490-00
A1DL100	119-1490-01	B012578		DELAY LINE,ELEC:73NS,150 OHM	80009	119-1490-01
A1J100	131-0608-00	B010100	B019999	TERMINAL,PIN:0.365 L X 0.025 PH BRZ GOLD	22526	47357
A1J110	136-0727-00			SKT,PL-IN ELEK:MICROCKT,8 CONTACT	09922	DILB8P-108
A1J118	136-0727-00			SKT,PL-IN ELEK:MICROCKT,8 CONTACT	09922	DILB8P-108
A1J119	136-0728-00			SKT,PL-IN ELEK:MICROCKT,14 CONTACT	09922	DILB14P-108
A1L101	108-0538-00			COIL,RF:2.7UH	76493	JWM#B7059
A1L107	108-0538-00			COIL,RF:2.7UH	76493	JWM#B7059
A1L113	108-0538-00			COIL,RF:2.7UH	76493	JWM#B7059
A1L115	108-0317-00			COIL,RF:FIXED,15UH	32159	71501M
A1L219	108-0538-00			COIL,RF:2.7UH	76493	JWM#B7059
A1L307	108-0538-00			COIL,RF:2.7UH	76493	JWM#B7059
A1L325	108-0538-00			COIL,RF:2.7UH	76493	JWM#B7059
A1L336	108-0538-00			COIL,RF:2.7UH	76493	JWM#B7059
A1L403	108-0552-00	B010100	B011999	COIL,RF:80NH	80009	108-0552-00
A1L403	-----			(TEST SELECTABLE)		
A1L403	108-0578-00	B020000		COIL,RF:FIXED,45NH	80009	108-0578-00
A1L521	108-0538-00			COIL,RF:2.7UH	76493	JWM#B7059
A1L605	108-0735-00			COIL,RF:FIXED,560NH	80009	108-0735-00
A1L606	108-0683-00			COIL,RF:FIXED,900NH	80009	108-0683-00
A1L607	108-0683-00			COIL,RF:FIXED,900NH	80009	108-0683-00
A1L608	108-0735-00			COIL,RF:FIXED,560NH	80009	108-0735-00
A1L609	108-0509-00			COIL,RF:2.45UH	80009	108-0509-00
A1L610	108-0509-00			COIL,RF:2.45UH	80009	108-0509-00
A1L611	108-0317-00			COIL,RF:FIXED,15UH	32159	71501M
A1L612	108-0317-00			COIL,RF:FIXED,15UH	32159	71501M
A1L619	108-0735-00			COIL,RF:FIXED,560NH	80009	108-0735-00
A1L619	114-0353-00	B020000		COIL,RF:VARIABLE,0.6 TO 1.0UH	80009	114-0353-00
A1L619	---			(OPTIONS 01,05,06,09 ONLY)		



Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A1L628	108-0327-00			COIL,RF:48NH	80009	108-0327-00
A1L633	108-0327-00			COIL,RF:48NH	80009	108-0327-00
A1L644	108-0736-00			COIL,RF:810NH	80009	108-0736-00
A1L644	114-0353-00	B020000		COIL,RF:VARIABLE,0.6 TO 1.0UH	80009	114-0353-00
A1L644	---			(OPTIONS 01,05,06,09 ONLY)		
A1L733	108-0538-00			COIL,RF:2.7UH	76493	JWM#B7059
A1L738	108-0317-00			COIL,RF:FIXED,15UH	32159	71501M
A1L740	108-0317-00			COIL,RF:FIXED,15UH	32159	71501M
A1L743	108-0538-00			COIL,RF:2.7UH	76493	JWM#B7059
A1L938	108-0538-00			COIL,RF:2.7UH	76493	JWM#B7059
A1L973	108-0538-00			COIL,RF:2.7UH	76493	JWM#B7059
A1LR101	108-0325-00			COIL,RF:0.5UH	80009	108-0325-00
A1LR107	108-0325-00			COIL,RF:0.5UH	80009	108-0325-00
A1LR180	108-0602-00			COIL,RF:60NH	80009	108-0602-00
A1LR201	108-0325-00			COIL,RF:0.5UH	80009	108-0325-00
A1LR218	108-0330-00			COIL,RF:0.4UH	80009	108-0330-00
A1LR280	108-0602-00			COIL,RF:60NH	80009	108-0602-00
A1Q130	151-0301-00			TRANSISTOR:SILICON,PNP	27014	2N2907A
A1Q131	151-0301-00			TRANSISTOR:SILICON,PNP	27014	2N2907A
A1Q154	151-0188-00			TRANSISTOR:SILICON,PNP	04713	SPS6868K
A1Q155	151-0188-00			TRANSISTOR:SILICON,PNP	04713	SPS6868K
A1Q190	151-0190-00			TRANSISTOR:SILICON,NPN	07283	S032677
A1Q460A,B	153-0547-00			SEMICOND DVC SE:SILICON,NPN,MATCHED	80009	153-0547-00
A1Q550	151-0190-00			TRANSISTOR:SILICON,NPN	07283	S032677
A1Q600	151-0190-00			TRANSISTOR:SILICON,NPN	07283	S032677
A1Q623	151-0190-00			TRANSISTOR:SILICON,NPN	07283	S032677
A1Q624	151-1042-01	B010100	0 B01999	SEMICOND DVC SE:FET,SI,TO-92	17856	J2595
A1Q624	151-1025-00	B020000		TRANSISTOR:SILICON,JFE,N-CHANNEL	01295	SFB8129
A1Q645	151-0188-00			TRANSISTOR:SILICON,PNP	04713	SPS6868K
A1Q700	151-0190-00			TRANSISTOR:SILICON,NPN	07283	S032677
A1Q709	151-0736-00			TRANSISTOR:SILICON,NPN	04713	SPS8317
A1Q741	151-0188-00			TRANSISTOR:SILICON,PNP	04713	SPS6868K
A1R100	315-0474-00			RES.,FXD,CMPSN:470K OHM,5%,0.25W	01121	CB4745
A1R100	---			(COMBO W/C100)		
A1R101	315-0272-00			RES.,FXD,CMPSN:2.7K OHM,5%,0.25W	01121	CB2725
A1R102	315-0272-00			RES.,FXD,CMPSN:2.7K OHM,5%,0.25W	01121	CB2725
A1R114	321-0130-00			RES.,FXD,FILM:221 OHM,1%,0.125W	91637	MFF1816G221R0F
A1R115	321-0146-00			RES.,FXD,FILM:324 OHM,1%,0.125W	91637	MFF1816G324R0F
A1R117	321-0285-00			RES.,FXD,FILM:9.09K OHM,1%,0.125W	91637	MFF1816G90900F
A1R118	321-0210-00			RES.,FXD,FILM:1.5K OHM,1%,0.125W	91637	MFF1816G15000F
A1R119	321-0354-00			RES.,FXD,FILM:47.5K OHM,1%,0.125W	91637	MFF1816G47501F
A1R120	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A1R121	315-0121-00			RES.,FXD,CMPSN:120 OHM,5%,0.25W	01121	CB1215
A1R123	315-0622-00			RES.,FXD,CMPSN:6.2K OHM,5%,0.25W	01121	CB6225
A1R125	301-0361-00			RES.,FXD,CMPSN:360 OHM,5%,0.50W	01121	EB3615
A1R129	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A1R130	315-0561-00			RES.,FXD,CMPSN:560 OHM,5%,0.25W	01121	CB5615
A1R131	315-0561-00			RES.,FXD,CMPSN:560 OHM,5%,0.25W	01121	CB5615
A1R133	315-0122-00			RES.,FXD,CMPSN:1.2K OHM,5%,0.25W	01121	CB1225
A1R135	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A1R136	315-0622-00			RES.,FXD,CMPSN:6.2K OHM,5%,0.25W	01121	CB6225

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A1R140	315-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715
A1R141	315-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715
A1R142	315-0391-00			RES.,FXD,CMPSN:390 OHM,5%,0.25W	01121	CB3915
A1R143	315-0391-00			RES.,FXD,CMPSN:390 OHM,5%,0.25W	01121	CB3915
A1R144	307-0108-00			RES.,FXD,CMPSN:6.8 OHM,5%,0.25W	01121	CB68G5
A1R149	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A1R152	315-0562-00			RES.,FXD,CMPSN:5.6K OHM,5%,0.25W	01121	CB5625
A1R153	315-0752-00			RES.,FXD,CMPSN:7.5K OHM,5%,0.25W	01121	CB7525
A1R154	321-0210-00			RES.,FXD,FILM:1.5K OHM,1%,0.125W	91637	MFF1816G15000F
A1R155	321-0210-00	B010100	B019999	RES.,FXD,FILM:1.5K OHM,1%,0.125W	91637	MFF1816G15000F
A1R155	321-0206-00	B020000		RES.,FXD,FILM:1.37K OHM,1%,0.125W	91637	MFF1816G13700F
A1R156	321-0255-00			RES.,FXD,FILM:4.42K OHM,1%,0.125W	91637	MFF1816G44200F
A1R159	321-0242-00			RES.,FXD,FILM:3.24K OHM,1%,0.125W	91637	MFF1816G32400F
A1R161	321-0289-00			RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A1R162	321-0289-00			RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A1R163	321-0242-00			RES.,FXD,FILM:3.24K OHM,1%,0.125W	91637	MFF1816G32400F
A1R165	315-0822-00			RES.,FXD,CMPSN:8.2K OHM,5%,0.25W	01121	CB8225
A1R190	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A1R191	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A1R192	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A1R193	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A1R194	317-0103-00	B010100	B019999	RES.,FXD,CMPSN:10K OHM,5%,0.125W	01121	BB1035
A1R195	315-0301-00			RES.,FXD,CMPSN:300 OHM,5%,0.25W	01121	CB3015
A1R196	315-0752-00			RES.,FXD,CMPSN:7.5K OHM,5%,0.25W	01121	CB7525
A1R197	315-0562-00			RES.,FXD,CMPSN:5.6K OHM,5%,0.25W	01121	CB5625
A1R198	321-1700-04			RES.,FXD,FILM:10.44K OHM,0.1%,0.125W	91637	MFF1816D10441B
A1R199	321-1700-04			RES.,FXD,FILM:10.44K OHM,0.1%,0.125W	91637	MFF1816D10441B
A1R201	315-0272-00			RES.,FXD,CMPSN:2.7K OHM,5%,0.25W	01121	CB2725
A1R202	315-0272-00			RES.,FXD,CMPSN:2.7K OHM,5%,0.25W	01121	CB2725
A1R216	315-0121-00			RES.,FXD,CMPSN:120 OHM,5%,0.25W	01121	CB1215
A1R217	321-0268-00			RES.,FXD,FILM:6.04K OHM,1%,0.125W	91637	MFF1816G60400F
A1R218	321-0210-00			RES.,FXD,FILM:1.5K OHM,1%,0.125W	91637	MFF1816G15000F
A1R219	321-0354-00			RES.,FXD,FILM:47.5K OHM,1%,0.125W	91637	MFF1816G47501F
A1R220	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A1R223	315-0822-00			RES.,FXD,CMPSN:6.2K OHM,5%,0.25W	01121	CB8225
A1R225	301-0361-00			RES.,FXD,CMPSN:360 OHM,5%,0.50W	01121	EB3615
A1R230	315-0222-00			RES.,FXD,CMPSN:2.2K OHM,5%,0.25W	01121	CB2225
A1R231	315-0222-00			RES.,FXD,CMPSN:2.2K OHM,5%,0.25W	01121	CB2225
A1R232	315-0222-00			RES.,FXD,CMPSN:2.2K OHM,5%,0.25W	01121	CB2225
A1R301	315-0240-00			RES.,FXD,CMPSN:24 OHM,5%,0.25W	01121	CB2405
A1R302	315-0240-00			RES.,FXD,CMPSN:24 OHM,5%,0.25W	01121	CB2405
A1R303	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A1R304	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A1R311	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A1R312	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A1R329	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A1R332	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A1R334	315-0392-00			RES.,FXD,CMPSN:3.9K OHM,5%,0.25W	01121	CB3925
A1R353	321-0265-00			RES.,FXD,FILM:5.62K OHM,1%,0.125W	91637	MFF1816G56200F
A1R355	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A1R357	315-0104-00			RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A1R358	315-0104-00			RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A1R359	315-0104-00			RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A1R360	321-0293-00			RES.,FXD,FILM:11K OHM,1%,0.125W	91637	MFF1816G11001F

Component No.	Tektronix Part No.	Serial/Model No. Eff	Discont	Name & Description	Mfr Code	Mfr Part Number
A1R361	315-0123-00			RES.,FXD,CMPSN:12K OHM,5%,0.25W	01121	CB1235
A1R362	315-0104-00			RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A1R363	315-0332-00			RES.,FXD,CMPSN:3.3K OHM,5%,0.25W	01121	CB3325
A1R401	321-0202-00			RES.,FXD,FILM:1.24K OHM,1%,0.125W	91637	MFF1816G12400F
A1R402	315-0750-00			RES.,FXD,CMPSN:75 OHM,5%,0.25W	01121	CB7505
A1R403	311-0635-00			RES.,VAR,NONWIR:1K OHM,10%,0.5%,0.5W	73138	82P-6-2-102K
A1R411	311-0978-01			RES.,VAR,NONWIR:250 OHM,10%,0.50W	73138	82-4-1
A1R412	315-0750-00			RES.,FXD,CMPSN:75 OHM,5%,0.25W	01121	CB7505
A1R416	315-0432-00			RES.,FXD,CMPSN:4.3K OHM,5%,0.25W	01121	CB4325
A1R417	311-1137-00			RES.,VAR,NONWIR:5K OHM,20%,0.50W	73138	72PX-67-0-502M
A1R430	315-0201-00			RES.,FXD,CMPSN:200 OHM,5%,0.25W	01121	CB2015
A1R440	321-0666-00			RES.,FXD,FILM:3.04K OHM,0.5%,0.125W	91637	MFF1816D30400D
A1R450	321-0310-00			RES.,FXD,FILM:16.5K OHM,1%,0.125W	91637	MFF1816G16501F
A1R451	321-0275-00			RES.,FXD,FILM:7.15K OHM,1%,0.125W	91637	MFF1816G71500F
A1R452	321-0310-00			RES.,FXD,FILM:16.5K OHM,1%,0.125W	91637	MFF1816G16501F
A1R453	321-0275-00			RES.,FXD,FILM:7.15K OHM,1%,0.125W	91637	MFF1816G71500F
A1R454	321-0310-00			RES.,FXD,FILM:16.5K OHM,1%,0.125W	91637	MFF1816G16501F
A1R455	321-0309-00			RES.,FXD,FILM:16.2K OHM,1%,0.125W	91637	MFF1816G16201F
A1R456	321-0303-00	B010100	B019999	RES.,FXD,FILM:14K OHM,1%,0.125W	91637	MFF1816G14001F
A1R456	321-0329-00	B020000		RES.,FXD,FILM:26.1K OHM,1%,0.125W	91637	MFF1816G26101F
A1R457	321-0275-00			RES.,FXD,FILM:7.15K OHM,1%,0.125W	91637	MFF1816G71500F
A1R458	321-0085-00			RES.,FXD,FILM:75 OHM,1%,0.125W	91637	MFF1816G75R00F
A1R459	321-0085-00			RES.,FXD,FILM:75 OHM,1%,0.125W	91637	MFF1816G75R00F
A1R459	----			(COMBO W/C459)		
A1R460	321-0062-00			RES.,FXD,FILM:43.2 OHM,1%,0.125W	91637	CMF55-116G43R20F
A1R461	321-0136-00	B010100	B019999	RES.,FXD,FILM:255 OHM,1%,0.125W	91637	MFF1816G255R0F
A1R461	321-0139-00	B020000		RES.,FXD,FILM:274 OHM,1%,0.125W	91637	MFF1816G274R0F
A1R462	321-0208-00	B010100	B019999	RES.,FXD,FILM:1.43K OHM,1%,0.125W	91637	MFF1816G14300F
A1R462	321-0201-00	B020000		RES.,FXD,FILM:1.21K OHM,1%,0.125W	91637	MFF1816G12100F
A1R463	321-0201-00	B010100	B019999	RES.,FXD,FILM:1.21K OHM,1%,0.125W	91637	MFF1816G12100F
A1R463	321-0193-00	B020000		RES.,FXD,FILM:1K OHM,1%,0.125W	91637	MFF1816G10000F
A1R464	321-0063-00			RES.,FXD,FILM:44.2 OHM,1%,0.125W	91637	MFF1816G44R20F
A1R465	321-0193-00			RES.,FXD,FILM:1K OHM,1%,0.125W	91637	MFF1816G10000F
A1R466	315-0360-00	B010100	B019999	RES.,FXD,CMPSN:36 OHM,5%,0.25W	01121	CB3605
A1R466	321-0275-00	B020000		RES.,FXD,FILM:7.15K OHM,1%,0.125W	91637	MFF1816G71500F
A1R466	----			(OPTIONS ONLY)		
A1R467	315-0360-00			RES.,FXD,CMPSN:36 OHM,5%,0.25W	01121	CB3605
A1R468	321-0275-00	B020000		RES.,FXD,FILM:7.15K OHM,1%,0.125W	91637	MFF1816G71500F
A1R470	315-0223-00			RES.,FXD,CMPSN:22K OHM,5%,0.25W	01121	CB2235
A1R471	315-0223-00			RES.,FXD,CMPSN:22K OHM,5%,0.25W	01121	CB2235
A1R476	315-0750-00			RES.,FXD,CMPSN:75 OHM,5%,0.25W	01121	CB7505
A1R477	315-0472-00			RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A1R478	321-0193-03			RES.,FXD,FILM:1K OHM,0.25%,0.125W	91637	MFF1816D10000C
A1R479	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A1R480	321-0378-00			RES.,FXD,FILM:84.5K OHM,1%,0.125W	91637	MFF1816G84501F
A1R481	321-0347-00			RES.,FXD,FILM:40.2K OHM,1%,0.125W	91637	MFF1816G40201F
A1R482	315-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715
A1R483	321-0347-00			RES.,FXD,FILM:40.2K OHM,1%,0.125W	91637	MFF1816G40201F
A1R484	315-0202-00			RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A1R485	315-0202-00			RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A1R488	321-0347-00			RES.,FXD,FILM:40.2K OHM,1%,0.125W	91637	MFF1816G40201F
A1R487	321-0130-03			RES.,FXD,FILM:221 OHM,0.25%,0.125W	91637	MFF1816D221R0C
A1R488	321-1216-03			RES.,FXD,FILM:1.76K OHM,0.25%,0.125W	91637	MFF1816D17600C
A1R489	321-1216-03			RES.,FXD,FILM:1.76K OHM,0.25%,0.125W	91637	MFF1816D17600C

Replaceable Electrical Parts—2465 Service

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A1R490	321-0378-00			RES.,FXD,FILM:84.5K OHM,1%,0.125W	91637	MFF1816G84501F
A1R491	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A1R492	321-0193-03			RES.,FXD,FILM:1K OHM,0.25%,0.125W	91637	MFF1816D10000C
A1R493	315-0472-00			RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A1R494	315-0201-00			RES.,FXD,CMPSN:200 OHM,5%,0.25W	01121	CB2015
A1R495	315-0750-00			RES.,FXD,CMPSN:75 OHM,5%,0.25W	01121	CB7505
A1R497	315-0821-00			RES.,FXD,CMPSN:820 OHM,5%,0.25W	01121	CB8215
A1R498	315-0821-00			RES.,FXD,CMPSN:820 OHM,5%,0.25W	01121	CB8215
A1R500	315-0331-00			RES.,FXD,CMPSN:330 OHM,5%,0.25W	01121	CB3315
A1R501	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A1R502	315-0622-00			RES.,FXD,CMPSN:6.2K OHM,5%,0.25W	01121	CB6225
A1R503	315-0103-00	B020000		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A1R504	315-0103-00	B020000		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A1R511	321-0320-00			RES.,FXD,FILM:21K OHM,1%,0.125W	91637	MFF1816G21001F
A1R512	321-0293-00			RES.,FXD,FILM:11K OHM,1%,0.125W	91637	MFF1816G11001F
A1R513	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A1R518	315-0680-00			RES.,FXD,CMPSN:68 OHM,5%,0.25W	01121	CB6805
A1R519	315-0621-00			RES.,FXD,CMPSN:620 OHM,5%,0.25W	01121	CB6215
A1R520	315-0393-00			RES.,FXD,CMPSN:39K OHM,5%,0.25W	01121	CB3935
A1R521	315-0750-00			RES.,FXD,CMPSN:75 OHM,5%,0.25W	01121	CB7505
A1R527	315-0750-00			RES.,FXD,CMPSN:75 OHM,5%,0.25W	01121	CB7505
A1R529	315-0561-00			RES.,FXD,CMPSN:560 OHM,5%,0.25W	01121	CB5615
A1R537	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A1R542	315-0680-00			RES.,FXD,CMPSN:68 OHM,5%,0.25W	01121	CB6805
A1R543	315-0621-00			RES.,FXD,CMPSN:620 OHM,5%,0.25W	01121	CB6215
A1R544	315-0393-00			RES.,FXD,CMPSN:39K OHM,5%,0.25W	01121	CB3935
A1R545	315-0750-00			RES.,FXD,CMPSN:75 OHM,5%,0.25W	01121	CB7505
A1R550	315-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715
A1R551	321-1682-07			RES.,FXD,FILM:5.7K OHM,0.1%,0.125W	91637	MFF1816C57000B
A1R552	321-0641-07			RES.,FXD,FILM:1.8K OHM,0.1%,0.125W	91637	MFF1816C18000B
A1R553	315-0152-00			RES.,FXD,CMPSN:1.5K OHM,5%,0.25W	01121	CB1525
A1R554	315-0162-00			RES.,FXD,CMPSN:1.6K OHM,5%,0.25W	01121	CB1625
A1R555	321-0294-00			RES.,FXD,FILM:11.3K OHM,1%,0.125W	91637	MFF1816G11301F
A1R556	321-0282-00			RES.,FXD,FILM:8.45K OHM,1%,0.125W	91637	MFF1816G84500F
A1R557	321-0808-07			RES.,FXD,FILM:300 OHM,0.1%,0.125W	24546	NE55E3000B
A1R558	321-0657-07			RES.,FXD,FILM:60 OHM,0.1%,0.125W	91637	CMF55-116C60R00B
A1R560	315-0621-00			RES.,FXD,CMPSN:620 OHM,5%,0.25W	01121	CB6215
A1R600	315-0270-00			RES.,FXD,CMPSN:27 OHM,5%,0.25W	01121	CB2705
A1R601	307-0108-00			RES.,FXD,CMPSN:6.8 OHM,5%,0.25W	01121	CB68G5
A1R602	307-0108-00			RES.,FXD,CMPSN:6.8 OHM,5%,0.25W	01121	CB68G5
A1R605	321-0112-00			RES.,FXD,FILM:143 OHM,1%,0.125W	91637	MFF1816G143R0F
A1R606	321-0002-00			RES.,FXD,FILM:10.2 OHM,1%,0.125W	91637	MFF1816G10R20F
A1R607	321-0002-00			RES.,FXD,FILM:10.2 OHM,1%,0.125W	91637	MFF1816G10R20F
A1R608	307-0108-00			RES.,FXD,CMPSN:6.8 OHM,5%,0.25W	01121	CB68G5
A1R614	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A1R615	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A1R617	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A1R618	311-1137-00			RES.,VAR, NONWIR:5K OHM,20%,0.50W	73138	72PX-67-0-502M
A1R619	315-0270-00			RES.,FXD,CMPSN:27 OHM,5%,0.25W	01121	CB2705
A1R622	321-0226-00	B010100	B019999	RES.,FXD,FILM:2.21K OHM,1%,0.125W	91637	MFF1816G22100F
A1R622	321-0255-00	B020000		RES.,FXD,FILM:4.42K OHM,1%,0.125W	91637	MFF1816G44200F
A1R624	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A1R638	311-1137-00			RES.,VAR, NONWIR:5K OHM,20%,0.50W	73138	72PX-67-0-502M
A1R639	311-2099-00			RES.,VAR, NONWIR:TRMR,500 OHM,10%,0.5W	73138	72-266-0
A1R639	-----			(IN SERIES W/W639)		

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A1R642	315-0432-00		RES.,FXD,CMPSN:4.3K OHM,5%,0.25W	01121	CB4325
A1R643	315-0750-00		RES.,FXD,CMPSN:75 OHM,5%,0.25W	01121	CB7505
A1R644	315-0472-00		RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A1R645	321-0625-00		RES.,FXD,FILM:5.88K OHM,1%,0.125W	91637	MFF1816G58800F
A1R646	321-0252-00		RES.,FXD,FILM:4.12K OHM,1%,0.125W	91637	MFF1816G41200F
A1R650	315-0203-00		RES.,FXD,CMPSN:20K OHM,5%,0.25W	01121	CB2035
A1R651	315-0911-00		RES.,FXD,CMPSN:910 OHM,5%,0.25W	01121	CB9115
A1R652	315-0274-00		RES.,FXD,CMPSN:270K OHM,5%,0.25W	01121	CB2745
A1R653	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A1R654	315-0911-00		RES.,FXD,CMPSN:910 OHM,5%,0.25W	01121	CB9115
A1R655	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A1R659	321-0147-00		RES.,FXD,FILM:332 OHM,1%,0.125W	91637	MFF1816G332R0F
A1R669	321-0406-00		RES.,FXD,FILM:165K OHM,1%,0.125W	91637	MFF1816G16502F
A1R670	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A1R671	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A1R672	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A1R678	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A1R700	315-0221-00		RES.,FXD,CMPSN:220 OHM,5%,0.25W	01121	CB2215
A1R701	321-0223-00		RES.,FXD,FILM:2.05K OHM,1%,0.125W	91637	MFF1816G20500F
A1R702	321-0252-00		RES.,FXD,FILM:4.12K OHM,1%,0.125W	91637	MFF1816G41200F
A1R707	315-0122-00		RES.,FXD,CMPSN:1.2K OHM,5%,0.25W	01121	CB1225
A1R708	315-0242-00		RES.,FXD,CMPSN:2.4K OHM,5%,0.25W	01121	CB2425
A1R709	315-0472-00		RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A1R710	315-0396-00		RES.,FXD,CMPSN:39M OHM,5%,0.25W	01121	CB3965
A1R713	315-0822-00		RES.,FXD,CMPSN:8.2K OHM,5%,0.25W	01121	CB8225
A1R723	321-0245-00		RES.,FXD,FILM:3.48K OHM,1%,0.125W	91637	MFF1816G34800F
A1R724	321-0680-00		RES.,FXD,FILM:35.3K OHM,0.5%,0.125W	91637	MFF1816D35301D
A1R731	315-0153-00		RES.,FXD,CMPSN:15K OHM,5%,0.25W	01121	CB1535
A1R732	315-0682-00		RES.,FXD,CMPSN:6.8K OHM,5%,0.25W	01121	CB6825
A1R733	315-0182-00		RES.,FXD,CMPSN:1.8K OHM,5%,0.25W	01121	CB1825
A1R734	315-0221-00		RES.,FXD,CMPSN:220 OHM,5%,0.25W	01121	CB2215
A1R735	315-0273-00		RES.,FXD,CMPSN:27K OHM,5%,0.25W	01121	CB2735
A1R736	321-0209-00		RES.,FXD,FILM:1.47K OHM,1%,0.125W	91637	MFF1816G14700F
A1R737	321-0255-00		RES.,FXD,FILM:4.42K OHM,1%,0.125W	91637	MFF1816G44200F
A1R738	321-0273-00		RES.,FXD,FILM:6.81K OHM,1%,0.125W	91637	MFF1816G68100F
A1R741	315-0272-00		RES.,FXD,CMPSN:2.7K OHM,5%,0.25W	01121	CB2725
A1R742	315-0151-00		RES.,FXD,CMPSN:150 OHM,5%,0.25W	01121	CB1515
A1R743	315-0750-00	B010100 B019999	RES.,FXD,CMPSN:75 OHM,5%,0.25W	01121	CB7505
A1R743	315-0102-00	B020000	RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A1R744	315-0750-00		RES.,FXD,CMPSN:75 OHM,5%,0.25W	01121	CB7505
A1R745	315-0242-00		RES.,FXD,CMPSN:2.4K OHM,5%,0.25W	01121	CB2425
A1R746	301-0470-00		RES.,FXD,CMPSN:47 OHM,5%,0.50W	01121	EB4705
A1R750	315-0271-00		RES.,FXD,CMPSN:270 OHM,5%,0.25W	01121	CB2715
A1R751	315-0622-00		RES.,FXD,CMPSN:6.2K OHM,5%,0.25W	01121	CB6225
A1R752	321-0269-00		RES.,FXD,FILM:6.19K OHM,1%,0.125W	91637	MFF1816G61900F
A1R753	321-0265-00		RES.,FXD,FILM:5.62K OHM,1%,0.125W	91637	MFF1816G56200F
A1R754	315-0104-00		RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A1R800	321-0147-00		RES.,FXD,FILM:332 OHM,1%,0.125W	91637	MFF1816G332R0F
A1R801	311-2099-00		RES.,VAR,NONWIR:TRMR,500 OHM,10%,0.5W	73138	72-266-0
A1R801	—		(IN SERIES W/W800)		
A1R802	311-1137-00		RES.,VAR,NONWIR:5K OHM,20%,0.50W	73138	72PX-67-0-502M
A1R804	315-0151-00		RES.,FXD,CMPSN:150 OHM,5%,0.25W	01121	CB1515
A1R805	311-2155-00	B010100 B019999	RES.,VAR,NONWIR:TRMR,200K OHM,10%,0.5W	01121	63H-204-T010
A1R805	311-1242-00	B020000	RES.,VAR,NONWIR:200K OHM,10%,0.50W	02111	63X-204-T602

Replaceable Electrical Parts—2465 Service

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscnt	Name & Description	Mfr Code	Mfr Part Number
A1R806	315-0204-00			RES.,FXD,CMPSN:200K OHM,5%,0.25W	01121	CB2045
A1R809	315-0151-00			RES.,FXD,CMPSN:150 OHM,5%,0.25W	01121	CB1515
A1R811	301-0331-00			RES.,FXD,CMPSN:330 OHM,5%,0.50W	01121	EB3315
A1R817	315-0221-00			RES.,FXD,CMPSN:220 OHM,5%,0.25W	01121	CB2215
A1R820	321-0327-00			RES.,FXD,FILM:24.9K OHM,1%,0.125W	91637	MFF1816G24901F
A1R821	321-0298-00			RES.,FXD,FILM:12.4K OHM,1%,0.125W	91637	MFF1816G12401F
A1R822	315-0271-00			RES.,FXD,CMPSN:270 OHM,5%,0.25W	01121	CB2715
A1R823	321-0193-00			RES.,FXD,FILM:1K OHM,1%,0.125W	91637	MFF1816G10000F
A1R850	311-1137-00			RES.,VAR,NONWIR:5K OHM,20%,0.50W	73138	72PX-67-0-502M
A1R852	315-0240-00			RES.,FXD,CMPSN:24 OHM,5%,0.25W	01121	CB2405
A1R853	315-0240-00			RES.,FXD,CMPSN:24 OHM,5%,0.25W	01121	CB2405
A1R855	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A1R856	321-0210-00			RES.,FXD,FILM:1.5K OHM,1%,0.125W	91637	MFF1816G15000F
A1R858	321-0239-00			RES.,FXD,FILM:3.01K OHM,1%,0.125W	91637	MFF1816G30100F
A1R860	311-1137-00			RES.,VAR,NONWIR:5K OHM,20%,0.50W	73138	72PX-67-0-502M
A1R901	315-0112-00	B020000		RES.,FXD,CMPSN:1.1K OHM,5%,0.25W	01121	CB1125
A1R902	315-0112-00	B020000		RES.,FXD,CMPSN:1.1K OHM,5%,0.25W	01121	CB1125
A1R903	315-0472-00	B020000		RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A1R904	315-0124-00			RES.,FXD,CMPSN:120K OHM,5%,0.25W	01121	CB1245
A1R907	315-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715
A1R910	315-0396-00			RES.,FXD,CMPSN:39M OHM,5%,0.25W	01121	CB3965
A1R912	315-0822-00			RES.,FXD,CMPSN:8.2K OHM,5%,0.25W	01121	CB8225
A1R924	321-0325-00			RES.,FXD,FILM:23.7K OHM,1%,0.125W	91637	MFF1816G23701F
A1R936	321-0217-00			RES.,FXD,FILM:1.78K OHM,1%,0.125W	91637	MFF1816G17800F
A1R937	321-0268-00			RES.,FXD,FILM:6.04K OHM,1%,0.125W	91637	MFF1816G60400F
A1R939	315-0332-00	B020000		RES.,FXD,CMPSN:3.3K OHM,5%,0.25W	01121	CB3325
A1R940	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A1R941	315-0102-00	B010100	B019999	RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A1R941	315-0561-00	B020000		RES.,FXD,CMPSN:560 OHM,5%,0.25W	01121	CB5615
A1R942	321-0256-00	B020000		RES.,FXD,FILM:4.53K OHM,1%,0.125W	91637	MFF1816G45300F
A1R943	315-0121-00			RES.,FXD,CMPSN:120 OHM,5%,0.25W	01121	CB1215
A1R944	317-0302-00			RES.,FXD,CMPSN:3K OHM,5%,0.125W	01121	BB3025
A1R945	315-0821-00			RES.,FXD,CMPSN:820 OHM,5%,0.25W	01121	CB8215
A1R950	301-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.50W	01121	EB4705
A1R951	308-0555-00			RES.,FXD,WW:5 OHM,5%,3W	00213	1200S-5R000J
A1R952	315-0750-00			RES.,FXD,CMPSN:75 OHM,5%,0.25W	01121	CB7505
A1R956	315-0302-00			RES.,FXD,CMPSN:3K OHM,5%,0.25W	01121	CB3025
A1R957	321-0291-00			RES.,FXD,FILM:10.5K OHM,1%,0.125W	91637	MFF1816G10501F
A1R972	315-0510-00			RES.,FXD,CMPSN:51 OHM,5%,0.25W	01121	CB5105
A1R973	315-0513-00			RES.,FXD,CMPSN:51K OHM,5%,0.25W	01121	CB5135
A1R981	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A1R995	315-0512-00			RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A1S615	280-1421-00			SWITCH,PUSH:1 STA,MOMENTARY,NON-SHORT	59821	QBD
A1U100	156-0235-00			MICROCIRCUIT,LI:VERTICAL PREAMP,TESTED	80009	156-0235-00
A1U110	156-1245-00			MICROCIRCUIT,LI:7 XSTR,HV/HIGH CUR	04713	MC1413PDS
A1U120	156-1245-00			MICROCIRCUIT,LI:7 XSTR,HV/HIGH CUR	04713	MC1413PDS
A1U130	156-1245-00			MICROCIRCUIT,LI:7 XSTR,HV/HIGH CUR	04713	MC1413PDS
A1U140	156-0651-02			MICROCIRCUIT,DI:8 BIT PRL-OUT SER SHF RGTR	01295	SN74LS164(NP3 OR
A1U150	156-0651-02			MICROCIRCUIT,DI:8 BIT PRL-OUT SER SHF RGTR	01295	SN74LS164(NP3 OR
A1U160	156-1200-01			MICROCIRCUIT,LI:OPERATIONAL AMPL,QUAD	01295	TL074CN/PEP3
A1U165	156-0495-02			MICROCIRCUIT,LI:QUAD OPNL AMPL,SELECTED	01295	LM324J4
A1U170	156-0513-02			MICROCIRCUIT,DI:8-CHANNEL MUX,SEL	80009	156-0513-02

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A1U200	155-0235-00			MICROCIRCUIT,LI:VERTICAL PREAMP,TESTED	80009	155-0235-00
A1U300	155-0238-00			MICROCIRCUIT,LI:TRIGGER PREAMP	80009	155-0238-00
A1U350	156-0853-02			MICROCIRCUIT,LI:DUAL OPNL AMPL,CHK	04713	LM358J
A1U400	155-0236-00			MICROCIRCUIT,LI:VERTICAL CHANNEL SWITCH	80009	155-0236-00
A1U450	156-0158-07			MICROCIRCUIT,LI:DUAL OPNL AMPL,SCREENED	01295	MC1458JG4
A1U475	156-0048-00			MICROCIRCUIT,LI:FIVE NPN TRANSISTOR ARRAY	02735	CA3046
A1U485	156-0048-00			MICROCIRCUIT,LI:FIVE NPN TRANSISTOR ARRAY	02735	CA3046
A1U500	155-0239-00			MICROCIRCUIT,LI:TRIGGER TESTED	80009	155-0239-00
A1U500	155-0239-01	B020000		MICROCIRCUIT,LI:TRIGGER H850,W/THRU HOLE (OPTIONS ONLY)	80009	155-0239-01
A1U500	-----					
A1U550	156-0048-00			MICROCIRCUIT,LI:FIVE NPN TRANSISTOR ARRAY	02735	CA3046
A1U600	155-0237-00			MICROCIRCUIT,LI:VERTICAL OUTPUT,TESTED	80009	155-0237-00
A1U850	155-0244-00			MICROCIRCUIT,DI:SYSTEM LOGIC INTERFACE		
A1U700	155-0240-00			MICROCIRCUIT,LI:VERTICAL OUTPUT,TESTED	80009	155-0240-00
A1U735	156-0048-00			MICROCIRCUIT,LI:FIVE NPN TRANSISTOR ARRAY	02735	CA3046
A1U800	155-0241-01			MICROCIRCUIT,LI:HORIZONTAL AMPLIFIER	80009	155-0241-01
A1U850	156-0515-02			MICROCIRCUIT,DI:TRIPLE 3-CHAN MUX,SEL	80009	156-0515-02
A1U880	156-0515-02			MICROCIRCUIT,DI:TRIPLE 3-CHAN MUX,SEL	80009	156-0515-02
A1U900	155-0240-00			MICROCIRCUIT,LI:VERTICAL OUTPUT,TESTED	80009	155-0240-00
A1U910	156-1191-01			MICROCIRCUIT,LI:DUAL BI-FET OP-AMP,8 DIP	01295	TL072ACP3
A1U950	155-0242-00	B010100	B011274	MICROCIRCUIT,LI:Z AXIS AUTOFOCUS,TESTED	80009	155-0242-00
A1U950	155-0242-01	B011275		MICROCIRCUIT,LI:Z AXIS AUTOFOCUS	80009	155-0242-01
A1U975	156-0382-02			MICROCIRCUIT,DI:QUAD 2-INP NAND GATE	01295	SN74LS00
A1U980	156-0479-02			MICROCIRCUIT,DI:QUAD 2-INP OR GATE	01295	SN74LS32NP3
A1VR125	152-0166-00			SEMICONV DEVICE:ZENER,0.4W,6.2V,5%	04713	SZ11738RL
A1VR225	152-0166-00			SEMICONV DEVICE:ZENER,0.4W,6.2V,5%	04713	SZ11738RL
A1VR550	152-0195-00			SEMICONV DEVICE:ZENER,0.4W,5.1V,5%	04713	SZ11755
A1W101	131-0566-00			BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0
A1W103	131-0566-00			BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0
A1W104	131-0566-00			BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0
A1W105	131-0566-00			BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0
A1W106	131-0566-00			BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0
A1W107	131-0566-00			BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0
A1W121	175-4594-00			CA ASSY,SP,ELEC:7,22 AWG,7.0 L,RIBBON	80009	175-4594-00
A1W122	175-4598-00			CA ASSY,SP,ELEC:8,26 AWG,7.0 L,RIBBON	80009	175-4598-00
A1W130	131-0566-00			BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0
A1W171	131-0566-00			BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0
A1W172	131-0566-00			BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0
A1W194	131-0566-00			BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0
A1W666	131-0566-00			BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0
A1W677	131-0566-00			BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0

Replaceable Electrical Parts—2465 Service

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A2	----		CKT BOARD ASSY:REGULATOR		
A2	----		(AVAILABLE AT 672-1037-XX LEVEL ONLY)		
A2C1016	285-1222-00		CAP.,FXD,PLSTC:0.068UF,20%,250V	55112	158/068/M/250/H
A2C1018	285-1222-00		CAP.,FXD,PLSTC:0.068UF,20%,250V	55112	158/068/M/250/H
A2C1208	281-0775-00		CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A2C1220	290-0939-00		CAP.,FXD,ELCTLT:10UF,+100-10%,100V	56289	672D106H100CG2C
A2C1226	281-0791-00		CAP.,FXD,CER DI:270PF,10%,100V	04222	GC101C271K
A2C1240	290-0939-00		CAP.,FXD,ELCTLT:10UF,+100-10%,100V	56289	672D106H100CG2C
A2C1245	281-0783-00		CAP.,FXD,CER DI:0.1UF,20%,100V	96733	ADVIXE
A2C1246	281-0791-00		CAP.,FXD,CER DI:270PF,10%,100V	04222	GC101C271K
A2C1260	290-0942-00		CAP.,FXD,ELCTLT:100UF,+100-10%,25V	56289	672D107H025CG2C
A2C1261	281-0773-00		CAP.,FXD,CER DI:0.01UF,10%,100V	04222	SA201C103KAA
A2C1270	281-0791-00		CAP.,FXD,CER DI:270PF,10%,100V	04222	GC101C271K
A2C1272	281-0826-00		CAP.,FXD,CER DI:2200PF,5%,100V	12969	CGB222KEX
A2C1274	290-0778-00		CAP.,FXD,ELCTLT:1UF,+50-10%,50V	54473	ECE-A50N1
A2C1280	290-0942-00		CAP.,FXD,ELCTLT:100UF,+100-10%,25V	56289	672D107H025CG2C
A2C1290	281-0775-00		CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A2C1291	290-0778-00		CAP.,FXD,ELCTLT:1UF,+50-10%,50V	54473	ECE-A50N1
A2C1300	290-0942-00		CAP.,FXD,ELCTLT:100UF,+100-10%,25V	56289	672D107H025CG2C
A2C1330	290-0942-00		CAP.,FXD,ELCTLT:100UF,+100-10%,25V	56289	672D107H025CG2C
A2C1331	281-0775-00		CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A2C1350	290-0942-00		CAP.,FXD,ELCTLT:100UF,+100-10%,25V	56289	672D107H025CG2C
A2C1357	281-0773-00		CAP.,FXD,CER DI:0.01UF,10%,100V	04222	SA201C103KAA
A2C1374	281-0791-00		CAP.,FXD,CER DI:270PF,10%,100V	04222	GC101C271K
A2C1400	290-0943-00		CAP.,FXD,ELCTLT:47UF,+50-10%,25V	55680	ULB1E470TECANA
A2C1402	290-0943-00		CAP.,FXD,ELCTLT:47UF,+50-10%,25V	55680	ULB1E470TECANA
A2CR1011	152-0750-00		SEMICONV DEVICE:RECT BRIDGE,600V,3A	80009	152-0750-00
A2CR1220	152-0066-00		SEMICONV DEVICE:SILICON,400V,750MA	14433	LG4016
A2CR1221	152-0066-00		SEMICONV DEVICE:SILICON,400V,750MA	14433	LG4016
A2CR1241	152-0066-00		SEMICONV DEVICE:SILICON,400V,750MA	14433	LG4016
A2CR1242	152-0066-00		SEMICONV DEVICE:SILICON,400V,750MA	14433	LG4016
A2CR1243	152-0066-00		SEMICONV DEVICE:SILICON,400V,750MA	14433	LG4016
A2CR1244	152-0066-00		SEMICONV DEVICE:SILICON,400V,750MA	14433	LG4016
A2CR1260	152-0066-00		SEMICONV DEVICE:SILICON,400V,750MA	14433	LG4016
A2CR1261	152-0066-00		SEMICONV DEVICE:SILICON,400V,750MA	14433	LG4016
A2CR1262	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A2CR1263	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A2CR1284	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A2CR1281	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A2CR1282	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A2CR1283	152-0066-00		SEMICONV DEVICE:SILICON,400V,750MA	14433	LG4016
A2CR1300	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A2CR1301	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A2CR1302	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A2CR1303	152-0066-00		SEMICONV DEVICE:SILICON,400V,750MA	14433	LG4016
A2CR1330	152-0066-00		SEMICONV DEVICE:SILICON,400V,750MA	14433	LG4016
A2CR1331	152-0066-00		SEMICONV DEVICE:SILICON,400V,750MA	14433	LG4016
A2CR1332	152-0066-00		SEMICONV DEVICE:SILICON,400V,750MA	14433	LG4016
A2CR1334	152-0066-00		SEMICONV DEVICE:SILICON,400V,750MA	14433	LG4016
A2CR1351	152-0066-00		SEMICONV DEVICE:SILICON,400V,750MA	14433	LG4016
A2CR1376	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R



Component No.	Tektronix	Serial/Model No.		Name & Description	Mfr	Mfr Part Number
	Part No.	Eff	Dscont		Code	
A2E1001	119-0181-00			ARSR,ELEC SURGE:230V,GAS FILLED	74276	CG230L
A2E1002	119-0181-00			ARSR,ELEC SURGE:230V,GAS FILLED	74276	CG230L
A2F1330	159-0185-00			FUSE,CARTRIDGE:5.2 X 20MM,0.75A,125V	000HX	TSC.75
A2L1011	108-0473-00			COIL,RF:150UH	80009	108-0473-00
A2L1012	108-0473-00			COIL,RF:150UH	80009	108-0473-00
A2L1402	108-0443-00			COIL,RF:25UH	80009	108-0443-00
A2P204	131-1048-00			TERM.QIK DISC:CKT BD MT,0.11 X 0.02	00779	61134-1
A2P205	131-1048-00			TERM.QIK DISC:CKT BD MT,0.11 X 0.02	00779	61134-1
A2P206	131-1048-00			TERM.QIK DISC:CKT BD MT,0.11 X 0.02	00779	61134-1
A2P207	131-1048-00			TERM.QIK DISC:CKT BD MT,0.11 X 0.02	00779	61134-1
A2Q1220	151-0497-00			TRANSISTOR:SILICON,NPN	04713	SJE1985
A2Q1221	151-0347-00			TRANSISTOR:SILICON,NPN	56289	2N5551
A2Q1222	151-0347-00			TRANSISTOR:SILICON,NPN	56289	2N5551
A2Q1223	151-0347-00			TRANSISTOR:SILICON,NPN	56289	2N5551
A2Q1240	151-0464-00			TRANSISTOR:SILICON,NPN	04713	SJE412
A2Q1241	151-0347-00			TRANSISTOR:SILICON,NPN	56289	2N5551
A2Q1243	151-0347-00			TRANSISTOR:SILICON,NPN	56289	2N5551
A2Q1245	151-0347-00			TRANSISTOR:SILICON,NPN	56289	2N5551
A2Q1280	151-0476-00			TRANSISTOR:SILICON,NPN	02735	68430
A2Q1281	151-0347-00			TRANSISTOR:SILICON,NPN	56289	2N5551
A2Q1300	151-0482-00			TRANSISTOR:SILICON,PNP	80009	151-0482-00
A2Q1301	151-0342-00			TRANSISTOR:SILICON,PNP	07263	S035928
A2Q1351	151-0429-00			TRANSISTOR:SILICON,PNP	04713	SJE957
A2Q1354	151-0342-00			TRANSISTOR:SILICON,PNP	07263	S035928
A2Q1370	151-0341-00			TRANSISTOR:SILICON,NPN	07263	S040065
A2Q1376	151-0341-00			TRANSISTOR:SILICON,NPN	07263	S040065
A2R1011	315-0560-00			RES.,FXD,CMPSN:56 OHM,5%,0.25W	01121	CB5605
A2R1012	315-0560-00			RES.,FXD,CMPSN:56 OHM,5%,0.25W	01121	CB5605
A2R1013	315-0154-00			RES.,FXD,CMPSN:150K OHM,5%,0.25W	01121	CB1545
A2R1014	315-0753-00			RES.,FXD,CMPSN:75K OHM,5%,0.25W	01121	CB7535
A2R1015	315-0753-00			RES.,FXD,CMPSN:75K OHM,5%,0.25W	01121	CB7535
A2R1016	301-0690-00			RES.,FXD,CMPSN:68 OHM,5%,0.50W	01121	EB6805
A2R1017	315-0474-00			RES.,FXD,CMPSN:470K OHM,5%,0.25W	01121	CB4745
A2R1018	301-0300-00			RES.,FXD,CMPSN:30 OHM,5%,0.50W	01121	EB3005
A2R1204	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A2R1208	315-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715
A2R1212	315-0393-00			RES.,FXD,CMPSN:39K OHM,5%,0.25W	01121	CB3935
A2R1220	304-0822-00			RES.,FXD,CMPSN:8.2K OHM,10%,1W	01121	GB8221
A2R1221	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A2R1222	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A2R1223	315-0823-00			RES.,FXD,CMPSN:82K OHM,5%,0.25W	01121	CB8235
A2R1226	315-0472-00			RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A2R1227	321-0634-00			RES.,FXD,FILM:84.85K OHM,0.25%,0.125W	91637	CMF55-116DB4651C
A2R1228	321-0293-03			RES.,FXD,FILM:11K OHM,0.25%,0.125W	24546	NC55C1102C
A2R1229	315-0683-00			RES.,FXD,CMPSN:68K OHM,5%,0.25W	01121	CB6835
A2R1240	303-0202-00			RES.,FXD,CMPSN:2K OHM,5%,1W	01121	GB2025
A2R1241	307-0105-00			RES.,FXD,CMPSN:3.9 OHM,5%,0.25W	01121	CB39G5
A2R1242	315-0152-00			RES.,FXD,CMPSN:1.5K OHM,5%,0.25W	01121	CB1525
A2R1243	315-0393-00			RES.,FXD,CMPSN:39K OHM,5%,0.25W	01121	CB3935
A2R1244	315-0104-00			RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045

Replaceable Electrical Parts—2465 Service

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A2R1246	315-0472-00		RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A2R1247	321-0368-00		RES.,FXD,FILM:66.5K OHM,1%,0.125W	91637	MFF1816G66501F
A2R1248	321-0319-00		RES.,FXD,FILM:20.5K OHM,1%,0.125W	91637	MFF1816G20501F
A2R1249	315-0473-00		RES.,FXD,CMPSN:47K OHM,5%,0.25W	01121	CB4735
A2R1261	321-0289-00		RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A2R1262	321-0318-00		RES.,FXD,FILM:20K OHM,1%,0.125W	91637	MFF1816G20001F
A2R1264	315-0473-00		RES.,FXD,CMPSN:47K OHM,5%,0.25W	01121	CB4735
A2R1270	315-0432-00		RES.,FXD,CMPSN:4.3K OHM,5%,0.25W	01121	CB4325
A2R1273	315-0473-00		RES.,FXD,CMPSN:47K OHM,5%,0.25W	01121	CB4735
A2R1274	315-0753-00		RES.,FXD,CMPSN:75K OHM,5%,0.25W	01121	CB7535
A2R1280	303-0470-00		RES.,FXD,CMPSN:47 OHM,5%,1W	01121	GB4705
A2R1281	308-0839-00		RES.,FXD,WW:0.1 OHM,5%,1.0W	75042	BW-20-R/1000J
A2R1282	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A2R1283	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A2R1284	321-0318-00		RES.,FXD,FILM:20K OHM,1%,0.125W	91637	MFF1816G20001F
A2R1285	321-0318-00		RES.,FXD,FILM:20K OHM,1%,0.125W	91637	MFF1816G20001F
A2R1286	315-0243-00		RES.,FXD,CMPSN:24K OHM,5%,0.25W	01121	CB2435
A2R1291	321-0334-00		RES.,FXD,FILM:29.4K OHM,1%,0.125W	91637	MFF1816G29401F
A2R1292	311-1138-00		RES.,VAR,NONWIR:1K OHM,20%,0.50W	73138	72XW-44-0-102M
A2R1293	321-0839-00		RES.,FXD,FILM:9.6K OHM,1%,0.125W	91637	MFF1816G96000F
A2R1300	303-0470-00		RES.,FXD,CMPSN:47 OHM,5%,1W	01121	GB4705
A2R1301	308-0839-00		RES.,FXD,WW:0.1 OHM,5%,1.0W	75042	BW-20-R/1000J
A2R1302	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A2R1304	315-0243-00		RES.,FXD,CMPSN:24K OHM,5%,0.25W	01121	CB2435
A2R1305	321-0289-06		RES.,FXD,FILM:10K OHM,0.25%,0.125W	91637	MFF1816C10001C
A2R1306	321-0318-03		RES.,FXD,FILM:20K OHM,0.25%,0.125W	24546	NC55C2002C
A2R1307	315-0472-00		RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A2R1309	315-0222-00		RES.,FXD,CMPSN:2.2K OHM,5%,0.25W	01121	CB2225
A2R1331	321-0335-00		RES.,FXD,FILM:30.1K OHM,1%,0.125W	91637	CMF55116G30101F
A2R1332	321-0318-00		RES.,FXD,FILM:20K OHM,1%,0.125W	91637	MFF1816G20001F
A2R1333	315-0751-00		RES.,FXD,CMPSN:750 OHM,5%,0.25W	01121	CB7515
A2R1334	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A2R1351	315-0202-00		RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A2R1352	301-0150-00		RES.,FXD,CMPSN:15 OHM,5%,0.50W	01121	EB1505
A2R1353	301-0150-00		RES.,FXD,CMPSN:15 OHM,5%,0.50W	01121	EB1505
A2R1354	315-0222-00		RES.,FXD,CMPSN:2.2K OHM,5%,0.25W	01121	CB2225
A2R1355	315-0682-00		RES.,FXD,CMPSN:6.8K OHM,5%,0.25W	01121	CB6825
A2R1356	315-0512-00	B010185	RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A2R1357	321-0310-00		RES.,FXD,FILM:18.5K OHM,1%,0.125W	91637	MFF1816G18501F
A2R1358	321-0319-00		RES.,FXD,FILM:20.5K OHM,1%,0.125W	91637	MFF1816G20501F
A2R1359	315-0682-00		RES.,FXD,CMPSN:6.8K OHM,5%,0.25W	01121	CB6825
A2R1370	321-0363-00		RES.,FXD,FILM:59K OHM,1%,0.125W	91637	MFF1816G59001F
A2R1372	321-0299-00		RES.,FXD,FILM:12.7K OHM,1%,0.125W	91637	MFF1816G12701F
A2R1374	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A2R1376	315-0203-00		RES.,FXD,CMPSN:20K OHM,5%,0.25W	01121	CB2035
A2R1378	315-0202-00		RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A2R1400	315-0111-00		RES.,FXD,CMPSN:110 OHM,5%,0.25W	01121	CB1115
A2R1402	315-0111-00		RES.,FXD,CMPSN:110 OHM,5%,0.25W	01121	CB1115
A2RT1010	307-0350-00		RES.,THERMAL:7.5 OHM,10%,3.9%/DEG C	15454	75DJ7R5R0220SS
A2RT1016	307-0746-00		RES.,THERMAL:5 OHM,10%,7A/DEG C	15454	SG-6
A2S350	260-1849-00		SWITCH,PUSH:DPDT,4A,250VAC,W/BRKT	31918	NE15/F2U103EE

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A2T1229	120-1401-00		XFMR,TRIG:	54937	OBD
A2TP201	131-0608-00		TERMINAL,PIN:0.365 L X 0.025 PH BRZ GOLD	22526	47357
A2U1260	156-1161-00		MICROCIRCUIT,LI:VOLTAGE REGULATOR	27014	LM317T
A2U1270	156-0495-02		MICROCIRCUIT,LI:QUAD OPNL AMPL,SELECTED	01295	LM324J4
A2U1281	156-0158-07		MICROCIRCUIT,LI:DUAL OPNL AMPL,SCREENED	01295	MC1458JG4
A2U1290	156-1173-00		MICROCIRCUIT,LI:VOLTAGE REFERENCE	04713	MC1403UDS
A2U1300	156-0495-02		MICROCIRCUIT,LI:QUAD OPNL AMPL,SELECTED	01295	LM324J4
A2U1330	156-0872-00		MICROCIRCUIT,LI:VOLTAGE REGULATOR	04713	MC7912C
A2U1371	156-0495-02		MICROCIRCUIT,LI:QUAD OPNL AMPL,SELECTED	01295	LM324J4
A2VR1293	152-0055-00		SEMICONV DEVICE:ZENER,0.4W,11V,5%	04713	SZG35009K1
A2W1226	131-0566-00		BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0
A2W1287	131-0566-00		BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0

Replaceable Electrical Parts—2465 Service

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscnt	Name & Description	Mfr Code	Mfr Part Number
A3	-----		CKT BOARD ASSY:INVERTER		
A3	-----		(AVAILABLE AT 672-1037-XX LEVEL ONLY)		
A3C1020	285-1192-00		CAP.,FXD,PPR DI:0.0022UF,20%,250VAC	000FG	PME271Y422
A3C1021	290-0971-00		CAP.,FXD,ELCTLT:290UF,+50-10%,200V	90201	TCG291T200N
A3C1022	290-0971-00		CAP.,FXD,ELCTLT:290UF,+50-10%,200V	90201	TCG291T200N
A3C1023	281-0773-00		CAP.,FXD,CER DI:0.01UF,10%,100V	04222	SA201C103KAA
A3C1025	290-0942-00		CAP.,FXD,ELCTLT:100UF,+100-10%,25V	56289	672D107H025CG2C
A3C1032	281-0812-00		CAP.,FXD,CER DI:1000PF,10%,100V	12969	CGB102KEX
A3C1033	281-0772-00		CAP.,FXD,CER DI:0.0047UF,10%,100V	04222	GC701C472K
A3C1034	290-0524-00		CAP.,FXD,ELCTLT:4.7UF,20%,10V	90201	TDC475M010EL
A3C1035	281-0772-00		CAP.,FXD,CER DI:0.0047UF,10%,100V	04222	GC701C472K
A3C1040	281-0773-00		CAP.,FXD,CER DI:0.01UF,10%,100V	04222	SA201C103KAA
A3C1048	281-0826-00		CAP.,FXD,CER DI:2200PF,5%,100V	12969	CGB222KEX
A3C1050	285-1254-00		CAP.,FXD,PLSTC:0.22UF,10%,400WVDC	84411	X363UW-224104
A3C1051	285-1192-00		CAP.,FXD,PPR DI:0.0022UF,20%,250VAC	000FG	PME271Y422
A3C1052	285-1196-00		CAP.,FXD,PAPER:0.01UF,20%,250V	80009	285-1196-00
A3C1062	281-0850-00		CAP.,FXD,CER DI:820PF,5%,50VDC	96733	R3149
A3C1065	285-1190-00		CAP.,FXD,MTLZD:0.056UF,5%,250V	55112	180.056 J 250C
A3C1066	290-0782-00		CAP.,FXD,ELCTLT:4.7UF,+75-10%,35V	55680	ULA1V4R7TEA
A3C1067	281-0850-00		CAP.,FXD,CER DI:820PF,5%,50VDC	96733	R3149
A3C1071	281-0772-00		CAP.,FXD,CER DI:0.0047UF,10%,100V	04222	GC701C472K
A3C1072	290-0806-00		CAP.,FXD,ELCTLT:3.3UF,+75-10%,350VDC	55680	UHU2V3RTEA
A3C1075	283-0421-00		CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A3C1101	290-0942-00		CAP.,FXD,ELCTLT:100UF,+100-10%,25V	56289	672D107H025CG2C
A3C1102	290-0942-00		CAP.,FXD,ELCTLT:100UF,+100-10%,25V	56289	672D107H025CG2C
A3C1110	290-0800-00		CAP.,FXD,ELCTLT:250UF,+100-10%,20V	56289	672D257H0200M5C
A3C1111	290-0800-00		CAP.,FXD,ELCTLT:250UF,+100-10%,20V	56289	672D257H0200M5C
A3C1112	290-0782-00		CAP.,FXD,ELCTLT:4.7UF,+75-10%,35V	55680	ULA1V4R7TEA
A3C1113	290-0798-00		CAP.,FXD,ELCTLT:180UF,+100-10%,40V	56289	672D187H040DM5C
A3C1114	290-0800-00		CAP.,FXD,ELCTLT:250UF,+100-10%,20V	56289	672D257H0200M5C
A3C1115	290-0800-00		CAP.,FXD,ELCTLT:250UF,+100-10%,20V	56289	672D257H0200M5C
A3C1116	290-0798-00		CAP.,FXD,ELCTLT:180UF,+100-10%,40V	56289	672D187H040DM5C
A3C1120	290-0939-00		CAP.,FXD,ELCTLT:10UF,+100-10%,100V	56289	672D106H100CG2C
A3C1130	290-0939-00		CAP.,FXD,ELCTLT:10UF,+100-10%,100V	56289	672D106H100CG2C
A3C1132	290-0860-00		CAP.,FXD,ELCTLT:10UF,+50-10%,160V	55680	UHU2C100TEA
A3CR1022	152-0333-00		SEMICONV DEVICE:SILICON,55V,200MA	07263	FDH-6012
A3CR1023	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A3CR1028	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A3CR1030	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A3CR1034	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A3CR1035	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A3CR1040	152-0075-00		SEMICONV DEVICE:GE,25V,40MA	14433	G866
A3CR1050	152-0661-00		SEMICONV DEVICE:RECT,SI,600V,3A,FAST	04713	MR856
A3CR1060	152-0040-00		SEMICONV DEVICE:SILICON,600V,1A	15238	LG109
A3CR1062	152-0333-00		SEMICONV DEVICE:SILICON,55V,200MA	07263	FDH-6012
A3CR1063	152-0333-00		SEMICONV DEVICE:SILICON,55V,200MA	07263	FDH-6012
A3CR1064	152-0333-00		SEMICONV DEVICE:SILICON,55V,200MA	07263	FDH-6012
A3CR1065	152-0333-00		SEMICONV DEVICE:SILICON,55V,200MA	07263	FDH-6012
A3CR1070	152-0040-00		SEMICONV DEVICE:SILICON,800V,1A	15238	LG109
A3CR1072	152-0066-00		SEMICONV DEVICE:SILICON,400V,750MA	14433	LG4016
A3CR1101	152-0400-00		SEMICONV DEVICE:SILICON,400V,1A	80009	152-0400-00
A3CR1102	152-0400-00		SEMICONV DEVICE:SILICON,400V,1A	80009	152-0400-00

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A3CR1103	152-0400-00		SEMICONV DEVICE:SILICON,400V,1A	80009	152-0400-00
A3CR1104	152-0400-00		SEMICONV DEVICE:SILICON,400V,1A	80009	152-0400-00
A3CR1105	152-0400-00		SEMICONV DEVICE:SILICON,400V,1A	80009	152-0400-00
A3CR1106	152-0400-00		SEMICONV DEVICE:SILICON,400V,1A	80009	152-0400-00
A3CR1110	152-0794-00		SEMICONV DEVICE:RECT,SI,10A,30V	81483	95-4269
A3CR1113	152-0633-00		SEMICONV DEVICE:RECT,SI,30V,3A	04713	1N5821
A3CR1114	152-0633-00		SEMICONV DEVICE:RECT,SI,30V,3A	04713	1N5821
A3CR1115	152-0633-00		SEMICONV DEVICE:RECT,SI,30V,3A	04713	1N5821
A3CR1116	152-0633-00		SEMICONV DEVICE:RECT,SI,30V,3A	04713	1N5821
A3CR1121	152-0400-00		SEMICONV DEVICE:SILICON,400V,1A	80009	152-0400-00
A3CR1122	152-0400-00		SEMICONV DEVICE:SILICON,400V,1A	80009	152-0400-00
A3CR1123	152-0400-00		SEMICONV DEVICE:SILICON,400V,1A	80009	152-0400-00
A3CR1124	152-0400-00		SEMICONV DEVICE:SILICON,400V,1A	80009	152-0400-00
A3CR1131	152-0400-00		SEMICONV DEVICE:SILICON,400V,1A	80009	152-0400-00
A3CR1132	152-0400-00		SEMICONV DEVICE:SILICON,400V,1A	80009	152-0400-00
A3F1101	159-0059-00		FUSE,WIRE LEAD:5A,FAST-BLOW	000HX	SPI-5A
A3F1102	159-0059-00		FUSE,WIRE LEAD:5A,FAST-BLOW	000HX	SPI-5A
A3L1110	108-0554-00		COIL,RF:5UH	80009	108-0554-00
A3L1113	108-1144-00		COIL,RF:FIXED,27UH	34479	RL1284
A3L1114	108-1144-00		COIL,RF:FIXED,27UH	34479	RL1284
A3L1115	108-1144-00		COIL,RF:FIXED,27UH	34479	RL1284
A3L1116	108-1144-00		COIL,RF:FIXED,27UH	34479	RL1284
A3Q1021	151-0301-00		TRANSISTOR:SILICON,PNP	27014	2N2907A
A3Q1022	151-0192-00		TRANSISTOR:SILICON,NPN,SEL FROM MPS652	04713	SPS8801
A3Q1029	151-0254-00		TRANSISTOR:SILICON,NPN	03508	X38L3118
A3Q1030	151-0301-00		TRANSISTOR:SILICON,PNP	27014	2N2907A
A3Q1040	151-0302-00		TRANSISTOR:SILICON,NPN	07263	S038487
A3Q1050	151-1152-00		TRANSISTOR:MOSFE,N-CHANNEL,SI,TO-220	04713	STP3002
A3Q1060	151-1152-00		TRANSISTOR:MOSFE,N-CHANNEL,SI,TO-220	04713	STP3002
A3Q1062	151-0302-00		TRANSISTOR:SILICON,NPN	07263	S038487
A3Q1070	151-1152-00		TRANSISTOR:MOSFE,N-CHANNEL,SI,TO-220	04713	STP3002
A3R1017	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A3R1018	315-0394-00		RES.,FXD,CMPSN:390K OHM,5%,0.25W	01121	CB3945
A3R1019	315-0394-00		RES.,FXD,CMPSN:390K OHM,5%,0.25W	01121	CB3945
A3R1020	301-0274-00		RES.,FXD,CMPSN:270K OHM,5%,0.50W	01121	EB2745
A3R1021	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A3R1022	315-0104-00		RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A3R1023	315-0122-00		RES.,FXD,CMPSN:1.2K OHM,5%,0.25W	01121	CB1225
A3R1024	315-0473-00		RES.,FXD,CMPSN:47K OHM,5%,0.25W	01121	CB4735
A3R1025	315-0302-00		RES.,FXD,CMPSN:3K OHM,5%,0.25W	01121	CB3025
A3R1027	321-0431-00		RES.,FXD,FILM:301K OHM,1%,0.125W	91637	MFF1616G30102F
A3R1028	321-0481-00		RES.,FXD,FILM:1M OHM,1%,0.125W	24546	NA4D1004F
A3R1029	315-0122-00		RES.,FXD,CMPSN:1.2K OHM,5%,0.25W	01121	CB1225
A3R1030	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A3R1031	315-0334-00		RES.,FXD,CMPSN:330K OHM,5%,0.25W	01121	CB3345
A3R1032	321-0335-00		RES.,FXD,FILM:30.1K OHM,1%,0.125W	91637	CMF55116G30101F
A3R1033	315-0104-00		RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A3R1034	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A3R1035	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A3R1036	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035

Replaceable Electrical Parts—2465 Service

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A3R1037	315-0562-00			RES.,FXD,CMPSN:5.6K OHM,5%,0.25W	01121	CB5625
A3R1040	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A3R1041	315-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715
A3R1042	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A3R1044	315-0273-00			RES.,FXD,CMPSN:27K OHM,5%,0.25W	01121	CB2735
A3R1045	321-0289-00			RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A3R1046	321-0422-00			RES.,FXD,FILM:243K OHM,1%,0.125W	91637	MFF1816G24302F
A3R1050	308-0843-00			RES.,FXD WW:0.2 OHM,5%,1.0W	91637	RS1AR2000JT/R
A3R1052	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A3R1060	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A3R1061	315-0202-00			RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A3R1062	315-0682-00			RES.,FXD,CMPSN:6.8K OHM,5%,0.25W	01121	CB6825
A3R1063	315-0202-00			RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A3R1064	315-0202-00			RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A3R1065	315-0124-00			RES.,FXD,CMPSN:120K OHM,5%,0.25W	01121	CB1245
A3R1066	315-0202-00			RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A3R1067	315-0682-00			RES.,FXD,CMPSN:6.8K OHM,5%,0.25W	01121	CB6825
A3R1068	315-0202-00			RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A3R1069	315-0104-00			RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A3R1070	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A3R1071	315-0431-00			RES.,FXD,CMPSN:430 OHM,5%,0.25W	01121	CB4315
A3R1072	315-0203-00			RES.,FXD,CMPSN:20K OHM,5%,0.25W	01121	CB2035
A3R1075	315-0472-00			RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A3R1101	307-0103-00	B010100	B019999	RES.,FXD,CMPSN:2.7 OHM,5%,0.25W	01121	CB27G5
A3R1102	307-0103-00	B010100	B019999	RES.,FXD,CMPSN:2.7 OHM,5%,0.25W	01121	CB27G5
A3R1129	315-0474-00			RES.,FXD,CMPSN:470K OHM,5%,0.25W	01121	CB4745
A3RL1060	108-0329-00			COIL,RF:2.5UH	80009	108-0329-00
A3T1020	120-1449-00			XFMR,COM MODE:	02113	P104
A3T1050	120-1417-00			XFMR,RF:POWER HIGH FREQUENCY	80009	120-1417-00
A3T1060	120-1437-00			XFMR,PWR,STPDN:	80009	120-1417-00
A3U1029	156-0885-00			MICROCIRCUIT,LI:OPTOELECTRONIC ISOLATOR	04713	SOC123A
A3U1030	156-1627-00			MICROCIRCUIT,LI:POWER WIDTH MODULATED CONT	01295	TL594CN
A3U1040	156-0885-00			MICROCIRCUIT,LI:OPTOELECTRONIC ISOLATOR	04713	SOC123A
A3U1062	156-0411-00			MICROCIRCUIT,LI:QUAD-COMP,SGL SUPPLY	27014	LM339N
A3U1064	156-0366-02			MICROCIRCUIT,DI:DUAL D FLIP-FLOP,CHK	80009	156-0366-02
A3U1066	156-0328-00			MICROCIRCUIT,DI:DUAL CLOCK DRIVER	27014	DS0026C
A3VR1020	152-0166-00			SEMICONV DEVICE:ZENER,0.4W,6.2V,5%	04713	SZ11738RL
A3VR1062	152-0168-00			SEMICONV DEVICE:ZENER,0.4W,12V,5%	04713	SZG35009K4
A3W1021	131-0566-00			BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0
A3W1022	131-0566-00			BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0
A3W1050	131-0566-00			BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0
A3W1060	131-0566-00			BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0
A3W1101	131-0566-00	B020000		BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0
A3W1102	131-0566-00	B020000		BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0

Component No.	Tektronix	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
	Part No.	Eff	Dscont			
A4	670-7278-00			CKT BOARD ASSY:BUS MONITOR	80009	670-7278-00
A4C2830	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A4C2835	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A4C2851	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A4C2855	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A4C2860	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A4C2885	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A4C2901	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A4C2911	281-0773-00			CAP.,FXD,CER DI:0.01UF,10%,100V	04222	SA201C103KAA
A4C2913	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A4C2926	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A4C2940	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A4C2950	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A4C2960	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A4C2970	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A4C2980	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A4C2990	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A4R2805	315-0472-00			RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A4R2830	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A4R2841	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A4R2842	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A4R2843	315-0472-00			RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A4R2844	315-0472-00			RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A4R2850	315-0472-00			RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A4R2901	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A4R2902	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A4R2903	321-1296-03			RES.,FXD,FILM:12K OHM,0.25%,0.125W	91637	MFF1818D12001C
A4R2905	321-0818-03			RES.,FXD,FILM:5K OHM,0.25%,0.125W	91637	MFF1818D50000C
A4R2910	321-0685-00			RES.,FXD,FILM:30K OHM,0.5%,0.125W	91637	MFF1818D30001D
A4R2911	321-0685-00			RES.,FXD,FILM:30K OHM,0.5%,0.125W	91637	MFF1818D30001D
A4R2912	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A4R2913	321-0198-00			RES.,FXD,FILM:1.13K OHM,1%,0.125W	91637	MFF1818G11300F
A4R2914	321-0306-00			RES.,FXD,FILM:15K OHM,1%,0.125W	91637	MFF1818G15001F
A4R2915	315-0202-00			RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A4R2920	315-0334-00			RES.,FXD,CMPSN:330K OHM,5%,0.25W	01121	CB3345
A4R2921	321-0724-03			RES.,FXD,FILM:13.6K OHM,0.25W,0.125W	24546	NC55C1362C
A4R2922	321-0758-00			RES.,FXD,FILM:50K OHM,1%,0.125W	24546	NA55D5002F
A4R2923	321-0385-00			RES.,FXD,FILM:100K OHM,1%,0.125W	91637	MFF1818G10002F
A4R2924	321-0414-00			RES.,FXD,FILM:200K OHM,1%,0.125W	91637	MFF1818G20002F
A4R2925	321-0235-02			RES.,FXD,FILM:2.74K OHM,0.5%,0.125W	91637	MFF1818G2741F
A4R2926	321-0225-01			RES.,FXD,FILM:2.15K OHM,5%,0.125W	80009	321-0255-01
A4R2927	315-0203-00			RES.,FXD,CMPSN:20K OHM,5%,0.25W	01121	CB2035
A4R2928	315-0472-00			RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A4R2929	315-0472-00			RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A4R2930	315-0202-00			RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A4R2940	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A4R2945	315-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715
A4R2975	315-0472-00			RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A4R2985	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A4U2800	158-0514-01			MICROCIRCUIT,DI:DIFF 4-CHANNEL MUX,SEL	80009	158-0514-01
A4U2805	158-0514-01			MICROCIRCUIT,DI:DIFF 4-CHANNEL MUX,SEL	80009	158-0514-01

# Replaceable Electrical Parts—2465 Service

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A4U2810	156-0382-02			MICROCIRCUIT,DI:QUAD 2-INP NAND GATE	01295	SN74LS00
A4U2820	156-1191-01			MICROCIRCUIT,LI:DUAL BI-FET OP-AMP,8 DIP	01295	TL072ACP3
A4U2830	156-1172-01			MICROCIRCUIT,DI:DUAL 4 BIT CNTR	01295	SN74LS393
A4U2835	156-0479-02			MICROCIRCUIT,DI:QUAD 2-INP OR GATE	01295	SN74LS32NP3
A4U2850	156-0388-03			MICROCIRCUIT,DI:DUAL D FLIP-FLOP	07263	74LS74A
A4U2855	156-0383-02			MICROCIRCUIT,DI:QUAD 2-INP NOR GATE	01295	SN74LS02
A4U2860	156-0975-02			MICROCIRCUIT,DI:UNIV SHIFT/STORAGE RGTR	01295	SN74LS299N3/J4
A4U2865	156-0796-01			MICROCIRCUIT,DI:8 STG SHF & STORE BUS RGTR	80009	156-0796-01
A4U2870	156-1172-01			MICROCIRCUIT,DI:DUAL 4 BIT CNTR	01295	SN74LS393
A4U2880	156-0388-03			MICROCIRCUIT,DI:DUAL D FLIP-FLOP	07263	74LS74A
A4U2885	156-0386-02			MICROCIRCUIT,DI:TRIPLE 3-INP NAND GATE	27014	DM74LS10N
A4U2890	156-0382-02			MICROCIRCUIT,DI:QUAD 2-INP NAND GATE	01295	SN74LS00
A4U2900	156-0386-02			MICROCIRCUIT,DI:TRIPLE 3-INP NAND GATE	27014	DM74LS10N
A4U2905	156-0982-03			MICROCIRCUIT,DI:OCTAL-D-EDGE FF,SCRN	01295	SN74LS374 N3
A4U2910	156-1555-00			MICROCIRCUIT,LI:D/A CONVERTER	34335	AM6080PC
A4U2920	156-0716-01			MICROCIRCUIT,DI:128 X 8 STATIC RAM,SCRN	80009	156-0716-01
A4U2930	160-1631-00	B010100	B019999	MICROCIRCUIT,DI:4096 X 8 EPROM	80009	160-1631-00
A4U2930	160-1631-02	B020000		MICROCIRCUIT,DI:4096 X 8 EPROM,PRGM	80009	160-1631-02
A4U2935	156-0956-02			MICROCIRCUIT,DI:OCTAL BFR W/3 STATE OUT	01295	SN74LS244NP3
A4U2940	156-1172-01			MICROCIRCUIT,DI:DUAL 4 BIT CNTR	01295	SN74LS393
A4U2950	156-0388-03			MICROCIRCUIT,DI:DUAL D FLIP-FLOP	07263	74LS74A
A4U2960	156-0796-01			MICROCIRCUIT,DI:8 STG SHF & STORE BUS RGTR	80009	156-0796-01
A4U2965	156-0382-02			MICROCIRCUIT,DI:QUAD 2-INP NAND GATE	01295	SN74LS00
A4U2970	156-0480-02			MICROCIRCUIT,DI:QUAD 2 INP & GATE	01295	SN74LS08NP3
A4U2980	156-0382-02			MICROCIRCUIT,DI:QUAD 2-INP NAND GATE	01295	SN74LS00
A4U2985	156-0768-01			MICROCIRCUIT,DI:BIDIRECT UNIV SE,SCREENED	01295	SN74LS194A
A4U2990	156-0381-02			MICROCIRCUIT,DI:QUAD 2-INP EXCL OR GATE	01295	SN74LS86
A4U2995	156-0651-02			MICROCIRCUIT,DI:8 BIT PRL-OUT SER SHF RGTR	01295	SN74LS164(NP3 OR
A4VR2805	152-0217-00			SEMICONV DEVICE:ZENER,0.4W,8.2V,5%	04713	SZG20
A4VR2925	152-0662-00			SEMICONV DEVICE:ZENER,0.4W,5V,1%	04713	SZG195
A4W2851	131-0566-00			BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0
A4W2913	131-0566-00			BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0
A5	670-7279-00			CKT BOARD ASSY:DIGITAL CONTROL	80009	670-7279-00
A5C2041	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A5C2188	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A5C2203	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A5C2217	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A5C2218	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A5C2221	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A5C2222	281-0814-00			CAP.,FXD,CER DI:100PF,10%,100V	04222	GC101A101K
A5C2223	290-0943-00			CAP.,FXD,ELCTL:47UF,+50-10%,25V	55680	ULB1E470TECANA
A5C2224	290-0943-00			CAP.,FXD,ELCTL:47UF,+50-10%,25V	55680	ULB1E470TECANA
A5C2240	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A5C2318	281-0791-00			CAP.,FXD,CER DI:270PF,10%,100V	04222	GC101C271K
A5C2326	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A5C2327	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A5C2328	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A5C2329	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A5C2330	285-1187-00			CAP.,FXD,MTLZD:0.47UF,10%,100V	55112	160.47 K 100F
A5C2346	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A5C2354	290-0943-00			CAP.,FXD,ELCTL:47UF,+50-10%,25V	55680	ULB1E470TECANA



Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A5C2440	281-0775-00		CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A5C2441	285-1187-00		CAP.,FXD,MTLZD:0.47UF,10%,100V	55112	160.47 K 100F
A5C2443	281-0775-00		CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A5C2475	281-0775-00		CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A5C2485	281-0775-00		CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A5C2486	281-0775-00		CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A5C2524	281-0775-00		CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A5C2527	281-0775-00		CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A5C2530	283-0423-00		CAP.,FXD,CER DI:0.22UF,+80-20%,50V	04222	DG015E224Z
A5C2536	281-0775-00		CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A5C2540	283-0423-00		CAP.,FXD,CER DI:0.22UF,+80-20%,50V	04222	DG015E224Z
A5C2542	283-0423-00		CAP.,FXD,CER DI:0.22UF,+80-20%,50V	04222	DG015E224Z
A5C2550	281-0775-00		CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A5C2565	281-0818-00		CAP.,FXD,CER DI:82PF,5%,100V	96733	R3247
A5C2566	281-0819-00		CAP.,FXD,CER DI:33PF,5%,50V	72982	8035BC0G330
A5C2572	281-0775-00		CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A5C2575	281-0775-00		CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A5C2586	281-0775-00		CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A5C2637	283-0423-00		CAP.,FXD,CER DI:0.22UF,+80-20%,50V	04222	DG015E224Z
A5C2638	285-1187-00		CAP.,FXD,MTLZD:0.47UF,10%,100V	55112	160.47 K 100F
A5C2640	285-1187-00		CAP.,FXD,MTLZD:0.47UF,10%,100V	55112	160.47 K 100F
A5C2642	281-0775-00		CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A5C2661	281-0775-00		CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A5C2734	281-0775-00		CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A5CR2004	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A5CR2021	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A5CR2122	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A5CR2651	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A5CR2723	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A5CR2731	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A5CR2733	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A5CR2742	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A5CR2744	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A5Q2025	151-0188-00		TRANSISTOR:SILICON,PNP	04713	SPS6868K
A5Q2322	151-0341-00		TRANSISTOR:SILICON,NPN	07263	S040065
A5R2012	315-0512-00		RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A5R2013	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2014	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2015	315-0512-00		RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A5R2016	315-0512-00		RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A5R2017	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2018	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2019	315-0512-00		RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A5R2020	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2022	315-0512-00		RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A5R2023	315-0203-00		RES.,FXD,CMPSN:20K OHM,5%,0.25W	01121	CB2035
A5R2028	315-0134-00		RES.,FXD,CMPSN:130K OHM,5%,0.25W	01121	CB1345
A5R2029	315-0134-00		RES.,FXD,CMPSN:130K OHM,5%,0.25W	01121	CB1345
A5R2040	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2103	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A5R2113	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035

# Replaceable Electrical Parts—2465 Service

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscnt	Name & Description	Mfr Code	Mfr Part Number
A5R2123	315-0222-00		RES.,FXD,CMPSN:2.2K OHM,5%,0.25W	01121	CB2225
A5R2127	311-1137-00		RES.,VAR,NONWIR:5K OHM,20%,0.50W	73138	72PX-67-0-502M
A5R2132	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2140	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A5R2141	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A5R2142	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2143	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A5R2144	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A5R2145	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A5R2162	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2185	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A5R2186	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2187	315-0104-00		RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A5R2224	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2227	321-0289-02		RES.,FXD,FILM:10K OHM,0.5%,0.125W	91637	CMF55-116D10001D
A5R2228	321-0289-02		RES.,FXD,FILM:10K OHM,0.5%,0.125W	91637	CMF55-116D10001D
A5R2229	321-0431-00		RES.,FXD,FILM:301K OHM,1%,0.125W	91637	MFF1816G30102F
A5R2230	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2241	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A5R2242	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A5R2243	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A5R2244	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A5R2245	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A5R2246	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A5R2285	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2286	315-0104-00		RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A5R2287	315-0104-00		RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A5R2288	315-0104-00		RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A5R2297	315-0104-00		RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A5R2298	315-0104-00		RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A5R2299	315-0104-00		RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A5R2303	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2312	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2313	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2314	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A5R2315	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A5R2316	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A5R2317	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A5R2319	315-0104-00		RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A5R2320	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2324	321-0177-02		RES.,FXD,FILM:681 OHM,0.5%,0.125W	80009	321-0177-02
A5R2325	321-0177-02		RES.,FXD,FILM:681 OHM,0.5%,0.125W	80009	321-0177-02
A5R2330	315-0203-00		RES.,FXD,CMPSN:20K OHM,5%,0.25W	01121	CB2035
A5R2340	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2341	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2342	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2343	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2344	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2345	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2444	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2445	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2446	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2447	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2448	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A5R2449	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2450	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2451	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2452	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2463	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2504	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2505	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2506	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2507	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2508	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2509	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2510	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2511	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2512	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2513	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2514	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2515	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2516	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2517	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2518	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2519	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2520	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2521	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2522	321-0917-03		RES.,FXD,FILM:27.2K OHM,0.25%,0.125W	91637	MFF1818D27201C
A5R2525	321-0327-03		RES.,FXD,FILM:24.9K OHM,0.25%,0.125W	24546	NC55C2492C
A5R2532	321-0324-00		RES.,FXD,FILM:23.2K OHM,1%,0.125W	91637	MFF1818G23201F
A5R2534	321-0289-02		RES.,FXD,FILM:10K OHM,0.5%,0.125W	91637	CMF55-118D10001D
A5R2535	315-0683-00		RES.,FXD,CMPSN:68K OHM,5%,0.25W	01121	CB6835
A5R2539	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2540	321-1618-02		RES.,FXD,FILM:6.5K OHM,0.5%,0.125W	91637	MFF1618D65000D
A5R2541	321-0923-02		RES.,FXD,FILM:25.1K OHM,0.5%,0.125W	24546	NC55C2512D
A5R2542	315-0203-00		RES.,FXD,CMPSN:20K OHM,5%,0.25W	01121	CB2035
A5R2543	315-0203-00		RES.,FXD,CMPSN:20K OHM,5%,0.25W	01121	CB2035
A5R2545	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2546	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2547	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2549	315-0681-00		RES.,FXD,CMPSN:680 OHM,5%,0.25W	01121	CB6815
A5R2551	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2552	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A5R2553	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2564	315-0331-00		RES.,FXD,CMPSN:330 OHM,5%,0.25W	01121	CB3315
A5R2571	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A5R2573	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A5R2608	315-0100-00		RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A5R2609	315-0104-00		RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A5R2610	315-0104-00		RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A5R2611	315-0104-00		RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A5R2612	315-0104-00		RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A5R2613	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2614	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2645	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2646	315-0332-00		RES.,FXD,CMPSN:3.3K OHM,5%,0.25W	01121	CB3325
A5R2647	315-0682-00		RES.,FXD,CMPSN:6.8K OHM,5%,0.25W	01121	CB6825
A5R2648	315-0243-00		RES.,FXD,CMPSN:24K OHM,5%,0.25W	01121	CB2435

Replaceable Electrical Parts—2465 Service

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A5R2649	315-0273-00			RES.,FXD,CMPSN:27K OHM,5%,0.25W	01121	CB2735
A5R2650	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2652	315-0225-00			RES.,FXD,CMPSN:2.2M OHM,5%,0.25W	01121	CB2255
A5R2662	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2663	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2703	315-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715
A5R2730	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2731	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2732	315-0222-00			RES.,FXD,CMPSN:2.2K OHM,5%,0.25W	01121	CB2225
A5R2734	315-0512-00			RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A5R2735	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2741	315-0222-00			RES.,FXD,CMPSN:2.2K OHM,5%,0.25W	01121	CB2225
A5R2742	315-0512-00			RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A5R2745	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A5R2764	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A5TP503	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 PH BRZ GOLD	22526	47357
A5TP504	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 PH BRZ GOLD	22526	47357
A5TP505	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 PH BRZ GOLD	22526	47357
A5TP506	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 PH BRZ GOLD	22526	47357
A5TP507	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 PH BRZ GOLD	22526	47357
A5TP509	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 PH BRZ GOLD	22526	47357
A5TP510	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 PH BRZ GOLD	22526	47357
A5TP511	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 PH BRZ GOLD	22526	47357
A5U2008	156-1566-00			MICROCIRCUIT,DI:EPROM,100 X 14	80009	156-1566-00
A5U2034	156-0865-02			MICROCIRCUIT,DI:OCTAL D-TYPE FF W/CLEAR	01295	SN74LS273NP3
A5U2092	156-1342-01			MICROCIRCUIT,DI:MPU,8 BIT W/CLK	07263	F88A08(P OR D)
A5U2108	156-1220-00			MICROCIRCUIT,DI:HEX BUS DRIVER	01295	SN74LS365A
A5U2118	156-1245-00			MICROCIRCUIT,LI:7 XSTR,HV/HIGH CUR	04713	MC1413PDS
A5U2134	156-0865-02			MICROCIRCUIT,DI:OCTAL D-TYPE FF W/CLEAR	01295	SN74LS273NP3
A5U2162	160-1628-03	B010100	B010999	MICROCIRCUIT,DI:4096 X 8 EPROM	80009	160-1628-03
A5U2162	160-1628-04	B011000	B012499	MICROCIRCUIT,DI:4096 X 8 EPROM,PRGM	80009	160-1628-04
A5U2161	160-1628-06	B012500		MICROCIRCUIT,DI:4096 X 8 EPROM,PRGM	80009	160-1628-06
A5U2178	160-1625-03	B010100	B010999	MICROCIRCUIT,DI:8K X 8 EPROM PRG	80009	160-1625-03
A5U2178	160-1625-04	B011000	B012499	MICROCIRCUIT,DI:8K X 8 EPROM,PRGM	80009	160-1625-04
A5U2178	160-1625-06	B012500		MICROCIRCUIT,DI:8192 X 8 EPROM,PRGM	80009	160-1625-06
A5U2194	156-0856-02			MICROCIRCUIT,DI:OCTAL BFR W/3 STATE OUT	01295	SN74LS244NP3
A5U2208	156-0391-02			MICROCIRCUIT,DI:HEX LATCH W/CLEAR	01295	SN74LS174
A5U2214	156-1126-01			MICROCIRCUIT,LI:VOLTAGE COMPARATOR,SEL	01295	LM311JG4
A5U2234	156-1589-00			MICROCIRCUIT,LI:DA CONVERTER,12 BIT,HI SPD	34335	AM6012PC
A5U2294	156-1065-01			MICROCIRCUIT,DI:OCTAL D TYPE TRANS LATCHES	34335	AM74LS373
A5U2308	156-0391-02			MICROCIRCUIT,DI:HEX LATCH W/CLEAR	01295	SN74LS174
A5U2335	156-0513-02			MICROCIRCUIT,DI:8-CHANNEL MUX,SEL	80009	156-0513-02
A5U2362	160-1627-03	B010100	B010999	MICROCIRCUIT,DI:8K X 8 EPROM,PRGM	80009	160-1627-03
A5U2362	160-1627-04	B011000	B012499	MICROCIRCUIT,DI:8K X 8 EPROM,PRGM	80009	160-1627-04
A5U2362	160-1627-06	B012500		MICROCIRCUIT,DI:8192 X 8 EPROM,PRGM	80009	160-1627-06
A5U2378	160-1626-03	B010100	B010999	MICROCIRCUIT,DI:8K X 8 EPROM,PRGM	80009	160-1626-03
A5U2378	160-1626-04	B011000	B012499	MICROCIRCUIT,DI:8K X 8 EPROM,PRGM	80009	160-1626-04
A5U2378	160-1626-06	B012500		MICROCIRCUIT,DI:8192 X 8 EPROM,PRGM	80009	160-1626-06
A5U2406	156-0513-02			MICROCIRCUIT,DI:8-CHANNEL MUX,SEL	80009	156-0513-02
A5U2418	156-0513-02			MICROCIRCUIT,DI:8-CHANNEL MUX,SEL	80009	156-0513-02
A5U2427	156-1200-01			MICROCIRCUIT,LI:OPERATIONAL AMPL,QUAD	01295	TL074CN/PEP3
A5U2435	156-1200-01			MICROCIRCUIT,LI:OPERATIONAL AMPL,QUAD	01295	TL074CN/PEP3

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A5U2456	156-1486-00		MICROCIRCUIT,DI:8 CHANNEL DATA SEL,SCREENED	04713	MC14512BCLD
A5U2468	156-0388-03		MICROCIRCUIT,DI:DUAL D FLIP-FLOP	07263	74LS74A
A5U2480	156-0469-02		MICROCIRCUIT,DI:3/8 LINE DCDR	01295	SN74LS138NP3
A5U2556	156-0385-02		MICROCIRCUIT,DI:HEX INVERTER	01295	SN74LS04
A5U2580	156-0469-02		MICROCIRCUIT,DI:3/8 LINE DCDR	01295	SN74LS138NP3
A5U2596	156-1026-02		MICROCIRCUIT,DI:4/1 LINE DECODER,BURN-IN	80009	156-1026-02
A5U2634	156-1191-01		MICROCIRCUIT,LI:DUAL BI-FET OP-AMP,8 DIP	01295	TL072ACP3
A5U2656	156-0804-02		MICROCIRCUIT,DI:QUADRUPL S-R LATCH,SCRN	01295	SN74LS279NP3
A5U2668	156-0895-01		MICROCIRCUIT,DI:14 BIT BINARY CNTR,BURN-IN	04713	MC14020BCLD
A5U2770	156-0469-02		MICROCIRCUIT,DI:3/8 LINE DCDR	01295	SN74LS138NP3
A5VR2003	152-0127-00		SEMICONV DEVICE:ZENER,0.4W,7.5V,5%	04713	SZG35009K2
A5VR2526	152-0278-00		SEMICONV DEVICE:ZENER,0.4W,3V,5%	04713	SZG35009K20
A5W2143	131-0566-00		BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0
A5W2526	131-0566-00		BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0
A5Y2568	158-0248-00		XTAL UNIT,QTZ:10MHZ, 0.01%,SERIES	80009	158-0248-00

Replaceable Electrical Parts—2465 Service

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscnt	Name & Description	Mfr Code	Mfr Part Number
A6	-----		CKT BOARD ASSY:FRONT PANEL		
A6	-----		(AVAILABLE AT 672-1038-XX LEVEL ONLY)		
A6CR3000	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3001	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3002	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3003	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3010	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3011	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3012	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3013	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3020	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3021	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3022	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3023	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3025	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3030	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3031	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3032	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3033	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3035	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3050	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3075	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3105	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3110	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3115	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3120	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3175	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3176	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3177	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3178	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3179	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3180	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3181	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3182	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3183	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3184	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3185	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3200	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3210	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3220	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3250	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3260	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6CR3270	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A6DS3300	150-1109-00		LT EMITTING DIO:GREEN, 30MA	73138	SP732
A6DS3301	150-1109-00		LT EMITTING DIO:GREEN, 30MA	73138	SP732
A6DS3302	150-1109-00		LT EMITTING DIO:GREEN, 30MA	73138	SP732
A6DS3303	150-1109-00		LT EMITTING DIO:GREEN, 30MA	73138	SP732
A6DS3304	150-1105-00		LT EMITTING DIO:YELLOW,30MA	50434	QLMP-0449
A6DS3310	150-1109-00		LT EMITTING DIO:GREEN, 30MA	73138	SP732
A6DS3311	150-1109-00		LT EMITTING DIO:GREEN, 30MA	73138	SP732
A6DS3312	150-1109-00		LT EMITTING DIO:GREEN, 30MA	73138	SP732
A6DS3313	150-1109-00		LT EMITTING DIO:GREEN, 30MA	73138	SP732

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A6DS3314	150-1105-00			LT EMITTING DIO:YELLOW,30MA	50434	QLMP-0449
A6DS3325	150-1109-00			LT EMITTING DIO:GREEN, 30MA	73138	SP732
A6DS3326	150-1109-00			LT EMITTING DIO:GREEN, 30MA	73138	SP732
A6DS3327	150-1109-00			LT EMITTING DIO:GREEN, 30MA	73138	SP732
A6DS3329	150-1105-00			LT EMITTING DIO:YELLOW,30MA	50434	QLMP-0449
A6DS3330	150-1109-00			LT EMITTING DIO:GREEN, 30MA	73138	SP732
A6DS3331	150-1109-00			LT EMITTING DIO:GREEN, 30MA	73138	SP732
A6DS3350	150-1109-00			LT EMITTING DIO:GREEN, 30MA	73138	SP732
A6DS3351	150-1105-00			LT EMITTING DIO:YELLOW,30MA	50434	QLMP-0449
A6DS3352	150-1105-00			LT EMITTING DIO:YELLOW,30MA	50434	QLMP-0449
A6DS3353	150-1105-00			LT EMITTING DIO:YELLOW,30MA	50434	QLMP-0449
A6DS3354	150-1109-00			LT EMITTING DIO:GREEN, 30MA	73138	SP732
A6DS3375	150-1105-00			LT EMITTING DIO:YELLOW,30MA	50434	QLMP-0449
A6DS3376	150-1109-00			LT EMITTING DIO:GREEN, 30MA	73138	SP732
A6DS3377	150-1109-00			LT EMITTING DIO:GREEN, 30MA	73138	SP732
A6DS3378	150-1109-00			LT EMITTING DIO:GREEN, 30MA	73138	SP732
A6DS3379	150-1109-00			LT EMITTING DIO:GREEN, 30MA	73138	SP732
A6DS3380	150-1105-00			LT EMITTING DIO:YELLOW,30MA	50434	QLMP-0449
A6DS3390	150-1105-00			LT EMITTING DIO:YELLOW,30MA	50434	QLMP-0449
A6DS3391	150-1109-00			LT EMITTING DIO:GREEN, 30MA	73138	SP732
A6DS3392	150-1109-00			LT EMITTING DIO:GREEN, 30MA	73138	SP732
A6DS3393	150-1109-00			LT EMITTING DIO:GREEN, 30MA	73138	SP732
A6R3021	311-2180-00			RES.,VAR,NONWW:LINEAR,2K OHM,30%,0.5W	32997	91Z1A-Z45-EA0019
A6R3031	311-2180-00			RES.,VAR,NONWW:LINEAR,2K OHM,30%,0.5W	32997	91Z1A-Z45-EA0019
A6R3050	311-2180-00			RES.,VAR,NONWW:LINEAR,2K OHM,30%,0.5W	32997	91Z1A-Z45-EA0019
A6R3075	311-2180-00			RES.,VAR,NONWW:LINEAR,2K OHM,30%,0.5W	32997	91Z1A-Z45-EA0019
A6R3100	311-2180-00			RES.,VAR,NONWW:LINEAR,2K OHM,30%,0.5W	32997	91Z1A-Z45-EA0019
A6R3125	311-2181-00			RES.,VAR,NONWW:LINEAR,5K OHM,30%,0.25W	32997	91Z2D-Z45-EA0020
A6R3150	311-2181-00			RES.,VAR,NONWW:LINEAR,5K OHM,30%,0.25W	32997	91Z2D-Z45-EA0020
A6R3190	311-2180-00			RES.,VAR,NONWW:LINEAR,2K OHM,30%,0.5W	32997	91Z1A-Z45-EA0019
A6R3200	311-2182-00			RES.,VAR,NONWW:LINEAR,5K OHM,30%,0.5W	32997	91Z2D-Z45-EA0021
A6R3210	311-2180-00			RES.,VAR,NONWW:LINEAR,2K OHM,30%,0.5W	32997	91Z1A-Z45-EA0019
A6R3300	315-0151-00			RES.,FXD,CMPSN:150 OHM,5%,0.25W	01121	CB1515
A6R3310	315-0151-00			RES.,FXD,CMPSN:150 OHM,5%,0.25W	01121	CB1515
A6R3325	315-0151-00			RES.,FXD,CMPSN:150 OHM,5%,0.25W	01121	CB1515
A6R3328	315-0151-00			RES.,FXD,CMPSN:150 OHM,5%,0.25W	01121	CB1515
A6R3327	315-0151-00			RES.,FXD,CMPSN:150 OHM,5%,0.25W	01121	CB1515
A6R3350	307-0611-00			RES NTWK,FXD FI:7,150 OHM,5%,1.125W	32997	4308R101-151J
A6S3000	280-2094-00			SWITCH,PUSH:4 BTN,SINGLE POLE,VERT CONT	80009	280-2094-00
A6S3010	280-2094-00			SWITCH,PUSH:4 BTN,SINGLE POLE,VERT CONT	80009	280-2094-00
A6S3020	280-2088-00			SWITCH,ROTARY:VOLTS/DIV	78854	OBD
A6S3025	280-2100-00			SWITCH,LEVER:DPDT,1 SECT,3 POSN,30 DEG	22753	OBD
A6S3030	280-2088-00			SWITCH,ROTARY:VOLTS/DIV	78854	OBD
A6S3035	280-2100-00			SWITCH,LEVER:DPDT,1 SECT,3 POSN,30 DEG	22753	OBD
A6S3050	280-2095-00			SWITCH,PUSH:2 BTN,SINGLE POLE,CHAN 3 &4	80009	280-2095-00
A6S3105	280-2087-00			SWITCH,PUSH:1 SINGLE BTN,SINGLE POLE,HO	80009	280-2087-00
A6S3110	280-2093-00			SWITCH,PUSH:3 BTN,SINGLE POLE,HORIZ	80009	280-2093-00
A6S3175	280-2085-00			SWITCH,ROTARY:TIME/DIV	78854	5-51625-001
A6S3185	280-2108-00	B010100	B019999	SWITCH,PUSH:SPST,0.1A,125VAC	80009	280-2108-00
A6S3185	280-2108-01	B020000		SWITCH,PUSH:SPST,0.1A,125VAC	01963	E63-39HE
A6S3210	280-2088-00			SWITCH,PUSH:SINGLE BTN,SINGLE POLE,TRIG	80009	280-2088-00
A6S3220	280-2088-00			SWITCH,PUSH:SINGLE BTN,SINGLE POLE,TRIG	80009	280-2088-00

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A6S3250	260-2100-00		SWITCH,LEVER:DPDT,1 SECT,3 POSN,30 DEG	22753	OBD
A6S3260	260-2100-00		SWITCH,LEVER:DPDT,1 SECT,3 POSN,30 DEG	22753	OBD
A6S3270	260-2100-00		SWITCH,LEVER:DPDT,1 SECT,3 POSN,30 DEG	22753	OBD
A6U3300	156-0651-02		MICROCIRCUIT,DI:8 BIT PRL-OUT SER SHF RGTR	01295	SN74LS164(NP3 OR
A6U3325	156-0651-02		MICROCIRCUIT,DI:8 BIT PRL-OUT SER SHF RGTR	01295	SN74LS164(NP3 OR
A6U3350	156-0651-02		MICROCIRCUIT,DI:8 BIT PRL-OUT SER SHF RGTR	01295	SN74LS164(NP3 OR
A6U3375	156-0651-02		MICROCIRCUIT,DI:8 BIT PRL-OUT SER SHF RGTR	01295	SN74LS164(NP3 OR
A6W651	175-4582-00		CA ASSY,SP,ELEC:26,28 AWG,8.5 L	80009	175-4582-00
A6W652	175-4584-00		CA ASSY,SP,ELEC:20,28 AWG,4.0 L	80009	175-4584-00



Component No.	Tektronix Part No.	Serial/Model No. Eff Dscnt	Name & Description	Mfr Code	Mfr Part Number
A7	670-7284-00		CKT BOARD ASSY:FRONT PANEL VARIABLE	80009	670-7284-00
A7R3420	311-2183-00		RES.,VAR,NONWW:LINEAR,5K OHM,30%,0.5W	32997	91ZID-Z36-EA0024
A7R3430	311-2183-00		RES.,VAR,NONWW:LINEAR,5K OHM,30%,0.5W	32997	91ZID-Z36-EA0024
A7R3475	311-2183-00		RES.,VAR,NONWW:LINEAR,5K OHM,30%,0.5W	32997	91ZID-Z36-EA0024
A8	670-7280-00		CKT BOARD ASSY:SCALE ILLUMINATION	80009	670-7280-00
A8DS90	150-0030-00		LAMP,GLOW:NEON,T-2,60 TO 90 VOLTS	74276	NE2V-T
A8DS90	-----		(SUBPART OF HV MODULE 152-0805-00)		
A8DS91	150-0030-00		LAMP,GLOW:NEON,T-2,60 TO 90 VOLTS	74276	NE2V-T
A8DS91	-----		(SUBPART OF HV MODULE 152-0805-00)		
A8DS100	150-0057-01		LAMP,INCAND:5V,0.115A,WIRE LD,SEL	76854	17AS15
A8DS101	150-0057-01		LAMP,INCAND:5V,0.115A,WIRE LD,SEL	76854	17AS15
A8DS102	150-0057-01		LAMP,INCAND:5V,0.115A,WIRE LD,SEL	76854	17AS15

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A9	670-7277-00			CKT BOARD ASSY:HIGH VOLTAGE	80009	670-7277-00
A9C90	283-0115-00			CAP.,FXD,CER DI:47PF,5%,200V	59660	805-519-C0G0470J
A9C91	283-0084-00			CAP.,FXD,CER DI:270PF,5%,1000V	59660	838 533X5F0 2715
A9C1812	285-1236-00			CAP.,FXD,PLSTC:0.022UF,20%,400V	84411	TEK-245-22304
A9C1813	285-1236-00			CAP.,FXD,PLSTC:0.022UF,20%,400V	84411	TEK-245-22304
A9C1886	285-1236-00			CAP.,FXD,PLSTC:0.022UF,20%,400V	84411	TEK-245-22304
A9C1888	285-1236-00			CAP.,FXD,PLSTC:0.022UF,20%,400V	84411	TEK-245-22304
A9C1889	285-1236-00			CAP.,FXD,PLSTC:0.022UF,20%,400V	84411	TEK-245-22304
A9C1890	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A9C1891	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A9C1909	281-0783-00			CAP.,FXD,CER DI:0.1UF,20%,100V	96733	ADVIXE
A9C1912	281-0798-00			CAP.,FXD,CER DI:51PF,1%,100V	96733	R2928
A9C1915	281-0783-00	B011000		CAP.,FXD,CER DI:0.1UF,20%,100V	96733	ADVIXE
A9C1932	281-0775-00			CAP.,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A9C1950	281-0766-00			CAP.,FXD,CER DI:100PF,20%,200V	04222	GC106C101M
A9C1951	290-0269-00			CAP.,FXD,ELCTLT:0.22UF,5%,35V	56289	162D224X5035BC2
A9C1971	285-1236-00			CAP.,FXD,PLSTC:0.022UF,20%,400V	84411	TEK-245-22304
A9C1972	290-0747-00			CAP.,FXD,ELCTLT:100UF,+50-10%,25V	56289	500D148
A9C1973	281-0771-00			CAP.,FXD,CER DI:0.0022UF,20%,200V	56289	292C Z5U222M200B
A9C1980	281-0773-00			CAP.,FXD,CER DI:0.01UF,10%,100V	04222	SA201C103KAA
A9C1990	285-1096-00			CAP.,FXD,PLSTC:1UF,10%,50V	14752	230B1A105K
A9C1991	281-0771-00			CAP.,FXD,CER DI:0.0022UF,20%,200V	56289	292C Z5U222M200B
A9CR1894	152-0400-00			SEMICONV DEVICE:SILICON,400V,1A	80009	152-0400-00
A9CR1895	152-0400-00			SEMICONV DEVICE:SILICON,400V,1A	80009	152-0400-00
A9CR1915	152-0061-00	B011000		SEMICONV DEVICE:SILICON,175V,100MA	07263	FDH2161
A9CR1930	152-0061-00			SEMICONV DEVICE:SILICON,175V,100MA	07263	FDH2161
A9CR1950	152-0061-00			SEMICONV DEVICE:SILICON,175V,100MA	07263	FDH2161
A9CR1951	152-0787-00	B010100	B010835	SEMICONV DEVICE:RECT,SI,12KV,3MA,A-LZV	000JF	ESJA25-12
A9CR1953	152-0061-00			SEMICONV DEVICE:SILICON,175V,100MA	07263	FDH2161
A9CR1990	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A9DS90	150-0030-00			LAMP,GLOW:NEON,T-2,60 TO 90 VOLTS	74276	NE2V-T
A9DS91	150-0030-00			LAMP,GLOW:NEON,T-2,60 TO 90 VOLTS	74276	NE2V-T
A9L1974	108-0318-00			COIL,RF,CMPSN:100 OHM, 5%, 0.25W	32159	81000M
A9Q1851	151-0443-00			TRANSISTOR:SILICON,PNP	04713	SPS7950
A9Q1852	151-0443-00			TRANSISTOR:SILICON,PNP	04713	SPS7950
A9Q1890	151-0443-00			TRANSISTOR:SILICON,PNP	04713	SPS7950
A9Q1980	151-0444-00			TRANSISTOR:SILICON,NPN	04713	SPS797
A9Q1981	151-0745-00			TRANSISTOR:SILICON,PNP	000IG	2SA1077G
A9R1812	315-0100-02			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A9R1813	315-0100-02			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A9R1820	315-0122-00			RES.,FXD,CMPSN:1.2K OHM,5%,0.25W	01121	CB1225
A9R1830	307-0110-00			RES.,FXD,CMPSN:3 OHM,5%,0.25W	01121	CB30G5
A9R1834	311-1227-00			RES.,VAR,NONWIR:5K OHM,20%,0.50W	32997	3386F-T04-502
A9R1842	311-1227-00			RES.,VAR,NONWIR:5K OHM,20%,0.50W	32997	3386F-T04-502
A9R1848	311-1227-00			RES.,VAR,NONWIR:5K OHM,20%,0.50W	32997	3386F-T04-502
A9R1853	321-0447-00			RES.,FXD,FILM:442K OHM,1%,0.125W	24546	NA55D4423F
A9R1854	321-0435-00			RES.,FXD,FILM:332K OHM,1%,0.125W	91637	MFF1816G33202F
A9R1855	321-0407-00			RES.,FXD,FILM:169K OHM,1%,0.125W	91637	MFF1816G16902F

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A9R1856	321-0367-00			RES.,FXD,FILM:64.9K OHM,1%,0.125W	91637	MFF1816G64901F
A9R1857	321-0364-00			RES.,FXD,FILM:60.4K OHM,1%,0.125W	91637	MFF1816G60401F
A9R1858	315-0105-00			RES.,FXD,CMPSN:1M OHM,5%,0.25W	01121	CB1055
A9R1864	311-1230-00			RES.,VAR, NONWIR:20K OHM,20%,0.50W	32997	3386F-T04-203
A9R1870	311-1214-00			RES.,VAR, NONWIR:200K OHM,20%,0.50W	73138	72-16-0
A9R1871	315-0154-00			RES.,FXD,CMPSN:150K OHM,5%,0.25W	01121	CB1545
A9R1872	315-0184-00			RES.,FXD,CMPSN:180K OHM,5%,0.25W	01121	CB1845
A9R1873	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A9R1878	311-1214-00			RES.,VAR, NONWIR:200K OHM,20%,0.50W	73138	72-16-0
A9R1880	315-0434-00			RES.,FXD,CMPSN:430K OHM,5%,0.25W	01121	CB4345
A9R1881	321-0385-00			RES.,FXD,FILM:100K OHM,1%,0.125W	91637	MFF1816G10002F
A9R1890	315-0473-00			RES.,FXD,CMPSN:47K OHM,5%,0.25W	01121	CB4735
A9R1891	321-0481-04			RES.,FXD,FILM:1M OHM,0.1%,0.125W	91637	HFF1816D10003B
A9R1892	321-0693-00			RES.,FXD,FILM:68.1K OHM,0.5%,0.125W	91637	CMF55-116G68101D
A9R1893	321-0481-04			RES.,FXD,FILM:1M OHM,0.1%,0.125W	91637	HFF1816D10003B
A9R1895	315-0123-00			RES.,FXD,CMPSN:12K OHM,5%,0.25W	01121	CB1235
A9R1896	315-0100-02			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A9R1897	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A9R1898	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A9R1910	321-0271-00			RES.,FXD,FILM:6.49K OHM,1%,0.125W	91637	MFF1816G64900F
A9R1911	321-0245-00			RES.,FXD,FILM:3.48K OHM,1%,0.125W	91637	MFF1816G34800F
A9R1913	315-0101-03	B011000		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A9R1920	315-0152-00			RES.,FXD,CMPSN:1.5K OHM,5%,0.25W	01121	CB1525
A9R1921	315-0100-02			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A9R1922	315-0101-06	B010100	B019999	RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A9R1922	315-0331-03	B011000		RES.,FXD,CMPSN:330 OHM,5%,0.25W	01121	CB3315
A9R1933	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A9R1941	315-0201-00			RES.,FXD,CMPSN:200 OHM,5%,0.25W	01121	CB2015
A9R1944	315-0163-00			RES.,FXD,CMPSN:16K OHM,5%,0.25W	01121	CB1635
A9R1945	321-0385-07			RES.,FXD,FILM:100K OHM,0.1%,0.125W	91637	MFF1816C10002B
A9R1950	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A9R1951	315-0220-00			RES.,FXD,CMPSN:22 OHM,5%,0.25W	01121	CB2205
A9R1952	315-0202-00			RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A9R1953	315-0393-00			RES.,FXD,CMPSN:39K OHM,5%,0.25W	01121	CB3935
A9R1971	315-0202-00			RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A9R1972	315-0224-00			RES.,FXD,CMPSN:220K OHM,5%,0.25W	01121	CB2245
A9R1973	315-0163-00			RES.,FXD,CMPSN:16K OHM,5%,0.25W	01121	CB1635
A9R1990	321-0693-00			RES.,FXD,FILM:68.1K OHM,0.5%,0.125W	91637	CMF55-116G68101D
A9R1991	315-0107-00			RES.,FXD,CMPSN:100M OHM,5%,0.25W	01121	CB1075
A9R1992	315-0244-00			RES.,FXD,CMPSN:240K OHM,5%,0.25W	01121	CB2445
A9R1994	321-0402-00			RES.,FXD,FILM:150K OHM,1%,0.125W	24546	NA55D1503F
A9T1970	120-1418-00			XFMR,PWR SU&SDN:HIGH VOLTAGE	80009	120-1418-00
A9U1830	152-0805-00			SEMICONV DEVICE:HV MULTIPLIER,20KV INPUT	80009	152-0805-00
A9U1890	156-1191-01			MICROCIRCUIT,LI:DUAL BI-FET OP-AMP,8 DIP	01295	TL072ACP3
A9U1956	156-0158-07			MICROCIRCUIT,LI:DUAL OPNL AMPL,SCREENED	01295	MC1458JG4
A9VR1891	152-0282-00			SEMICONV DEVICE:ZENER,0.4W,30V,5%	14552	1N972B
A9W1909	131-0566-00			BUS CONDUCTOR:DUMMY RES.2.375,22 AWG	57668	JWW-0200E0

Replaceable Electrical Parts--2465 Service

Component No.	Tektronix Part No.	Serial/Model No. Eff Discont	Name & Description	Mfr Code	Mfr Part Number
A10	670-7390-00		CKT BOARD ASSY:FAN MOTOR	80009	670-7390-00
A10B1690	147-0035-00		MOTOR,DC:BRUSHLESS,10-15VDC,145MA	25088	1A03001-0A
A10C1698	290-0804-00		CAP.,FXD,ELCTLT:10UF,+50-10%,25V	55680	ULA1E100TEA
A10CR1691	152-0141-02		SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A10CR1692	152-0141-02		SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A10CR1694	152-0141-02		SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A10CR1696	152-0141-02		SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A10CR1699	152-0141-02		SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A10Q1698	151-0301-00		TRANSISTOR:SILICON,PNP	27014	2N2907A
A10R1691	303-0150-00		RES.,FXD,CMPSN:15 OHM,5%,1W	01121	GB1505
A10R1692	321-0062-00		RES.,FXD,FILM:43.2 OHM,1%,0.125W	91637	CMF55-116G43R20F
A10R1693	323-0155-00		RES.,FXD,FILM:402 OHM,1%,0.50W	75042	CECT0-4020F
A10R1694	323-0155-00		RES.,FXD,FILM:402 OHM,1%,0.50W	75042	CECT0-4020F
A10R1695	321-0222-00		RES.,FXD,FILM:2K OHM,1%,0.125W	91637	MFF1816G20000F
A10R1697	321-0190-00		RES.,FXD,FILM:931 OHM,1%,0.125W	91637	MFF1816G931R0F
A10RT1696	307-0124-00		RES.,THERMAL:5K OHM,10%	50157	1D1618
A10U1690	156-0281-00		MICROCIRCUIT,LI:4 TRANSISTOR ARRAY	02735	89164
A13	307-1154-00		PASSIVE NETWORK:CRT TERMINATOR,FINISHED	80009	307-1154-00

Component No.	Tektronix Serial/Model No.		Name & Description	Mfr	
	Part No.	Eff Discnt		Code	Mfr Part Number
A14	670-8000-00		CKT BOARD ASSY:DYNAMIC CENTERING	80009	670-8000-00
A14C3401	283-0421-00		CAP.,FXD,CER DI:0.1UF,+80-20%,50V	04222	DG015E104Z
A14R3401	311-1137-00		RES.,VAR,NONWIR:5K OHM,20%,0.50W	73138	72PX-67-0-502M
A14R3402	315-0222-00		RES.,FXD,CMPSN:2.2K OHM,5%,0.25W	01121	CB2225
A14R3403	315-0750-00		RES.,FXD,CMPSN:75 OHM,5%,0.25W	01121	CB7505
A14R3404	321-0284-00		RES.,FXD,FILM:8.87K OHM,1%,0.125W	91637	MFF1816G88700F
A14R3405	315-0750-00		RES.,FXD,CMPSN:75 OHM,5%,0.25W	01121	CB7505
A14R3406	315-0123-00		RES.,FXD,CMPSN:12K OHM,5%,0.25W	01121	CB1235
A14R3407	311-1137-00		RES.,VAR,NONWIR:5K OHM,20%,0.50W	73138	72PX-67-0-502M
A14R3408	321-0284-00		RES.,FXD,FILM:8.87K OHM,1%,0.125W	91637	MFF1816G88700F
A14R3409	315-0222-00		RES.,FXD,CMPSN:2.2K OHM,5%,0.25W	01121	CB2225
A14R3410	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A14R3411	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A14U3401	156-0130-02		MICROCIRCUIT,LI:MODULATOR/DEMODULATOR,SCRN	04713	SC77162GH
A14U3402	156-0130-02		MICROCIRCUIT,LI:MODULATOR/DEMODULATOR,SCRN	04713	SC77162GH
A14VR3401	152-0227-00		SEMICONV DEVICE:ZENER,0.4W,6.2V,5%	04713	SZ13903

Component No.	Tektronix Part No.	Serial/Model No. Eff	Discont	Name & Description	Mfr Code	Mfr Part Number
CHASSIS PARTS						
F90	159-0021-00			FUSE, CARTRIDGE:3AG,2A,250V,FAST-BLOW	71400	AGC 2
F90	-----			(SUBPART OF STANDARD & OPT. A4 ONLY)		
F90	159-0098-00	B010100	B012849	FUSE, CARTRIDGE:DIN,1.6A		EQ1.6
F90	-----			(SUBPART OF OPTIONS A1,A2,A3,A5)		
F90	159-0229-00	B012850		FUSE, CARTRIDGE:5 X 20MM,1.6A,250V,TIME DEL	75915	21301,6 EAK 1,6
F90	-----			(SUBPART OF OPTIONS A1,A2,A3,A5)		
R134	311-2174-00			RES., VAR, NONWIR:5 OHM,20%,0.5W LINEAR	12697	CM43515
R351	311-1428-00			RES., VAR, NONWIR:20K OHM,1W	01121	10M959
R352	311-1428-00			RES., VAR, NONWIR:20K OHM,1W	01121	10M959
R975	311-2174-00			RES., VAR, NONWIR:5 OHM,20%,0.5W LINEAR	12697	CM43515
R976	311-2174-00			RES., VAR, NONWIR:5 OHM,20%,0.5W LINEAR	12697	CM43515
R977	311-2174-00			RES., VAR, NONWIR:5 OHM,20%,0.5W LINEAR	12697	CM43515
S90	260-1967-00			SWITCH, SLIDE:DPDT,5A/250V	000FJ	4021.0512
S90	-----			(SUBPART OF 672-1037-01)		
S1020	260-0907-00			SW, THERMOSTATIC:OPEN 97.8,CL 75.6,10A,240V	93410	430-349
V900	154-0850-00			ELECTRON TUBE:CRT	80009	154-0850-00